

EE-2025

Fall-2001

Lecture 10
Linearity & Time-Invariance
01-Oct-01

Info: Web-CT, Lab, HW

- **UTILIZE OFFICE HOURS**
- Prepare for on-line Pre-Post-Labs
 - Run MATLAB GUIs for Lab #6
- Labs #5 and #6: Image Processing
 - Sampling & Zooming
 - Deconvolution: Image Restoration
- Quiz #2 on 22-Oct
 - Problem Sets #3, #4, #5, #6 and #7

9/29/2001

EE-2025 Fall-2001 jMc/rmm

2

EDUCATION

- Education is the one product where the consumer tries to get as little as possible for his/her money.

READING ASSIGNMENTS

- This Lecture:
 - Chapter 5, pp. 133-152
- Other Reading:
 - Recitation: Ch. 5, pp. 127-133, 142-146
 - **CONVOLUTION**
 - Next Lecture: Chapter 6, start

LECTURE

9/29/2001

EE-2025 Fall-2001 jMc/rmm

3

9/29/2001

EE-2025 Fall-2001 jMc/rmm

4

LECTURE OBJECTIVES

- BLOCK DIAGRAM REPRESENTATION
 - Components for **Hardware**
 - **Connect** Simple Filters Together to Build More Complicated Systems
- **GENERAL PROPERTIES** of FILTERS
 - LINEARITY
 - TIME-INVARIANCE **LTI SYSTEMS**
 - ==> **CONVOLUTION**

OVERVIEW


- IMPULSE RESPONSE, $h[n]$
 - FIR case: same as $\{b_k\}$
- CONVOLUTION
 - GENERAL: $y[n] = x[n]*h[n]$
- GENERAL CLASS of SYSTEMS
 - LINEAR and TIME-INVARIANT
- **ALL LTI have $h[n]$ & use convolution !**

DIGITAL FILTERING



- CONCENTRATE on the FILTER (DSP)
- DISCRETE-TIME SIGNALS
 - FUNCTIONS of n , the "time index"
 - INPUT $x[n]$
 - OUTPUT $y[n]$

BUILDING BLOCKS

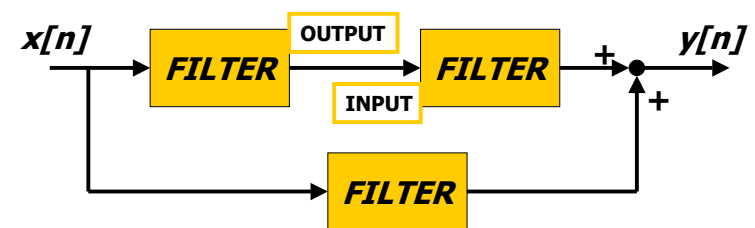

- BUILD UP COMPLICATED FILTERS
 - FROM SIMPLE **MODULES**
 - Ex: FILTER **MODULE** MIGHT BE 3-pt FIR

GENERAL FIR FILTER

- FILTER COEFFICIENTS $\{b_k\}$

- DEFINE THE FILTER

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

- For example, $\{b_k\} = \{3, -1, 2, 1\}$

$$y[n] = \sum_{k=0}^3 b_k x[n-k]$$

$$= 3x[n] - x[n-1] + 2x[n-2] + x[n-3]$$

9/29/2001

EE-2025 Fall-2001 jMc/rmm

9

MATLAB for FIR FILTER

- $yy = \text{conv}(bb, xx)$

- VECTOR **bb** contains Filter Coefficients

- DSP-First: $yy = \text{firfilt}(bb, xx)$

- FILTER COEFFICIENTS $\{b_k\}$

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

conv2()
for images

9/29/2001

EE-2025 Fall-2001 jMc/rmm

10


SPECIAL INPUT SIGNALS

- $x[n] = \text{SINUSOID}$ **FREQUENCY RESPONSE**

- $x[n]$ has only one NON-ZERO VALUE

$$\delta[n] = \begin{cases} 1 & n = 0 \\ 0 & n \neq 0 \end{cases}$$

UNIT-IMPULSE

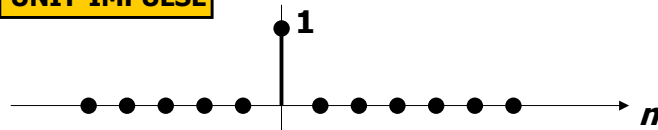

9/29/2001

EE-2025 Fall-2001 jMc/rmm

11

FIR IMPULSE RESPONSE

- Convolution = Filter Definition

- Filter Coeffs = Impulse Response

n	$n < 0$	0	1	2	3	...	M	$M+1$	$n > M+1$
$x[n] = \delta[n]$	0	1	0	0	0	0	0	0	0
$y[n] = h[n]$	0	b_0	b_1	b_2	b_3	...	b_M	0	0

$$h[n] = \sum_{k=0}^M b_k \delta[n-k]$$

9/29/2001


EE-2025 Fall-2001 jMc/rmm

12

MATH FORMULA for $h[n]$

Use **SHIFTED** IMPULSES to write $h[n]$

$$h[n] = \delta[n] - \delta[n-1] + 2\delta[n-2] - \delta[n-3] + \delta[n-4]$$

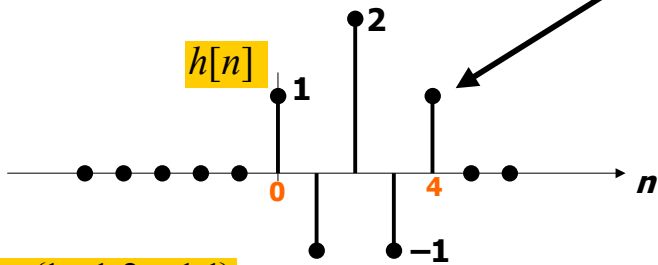

$$\{b_k\} = \{1, -1, 2, -1, 1\}$$

LTI: Convolution Sum

Output = Convolution of $x[n]$ & $h[n]$

NOTATION: $y[n] = x[n]*h[n]$

Here is the FIR case:

$$y[n] = \sum_{k=0}^M h[k]x[n-k]$$

FINITE LIMITS

Same as b_k

FINITE LIMITS

CONVOLUTION Example

$$h[n] = \delta[n] - \delta[n-1] + 2\delta[n-2] - \delta[n-3] + \delta[n-4]$$


$$x[n] = u[n]$$

n	-1	0	1	2	3	4	5	6	7
$x[n]$	0	1	1	1	1	1	1	1	...
$h[n]$	0	1	-1	2	-1	1	0	0	0
	0	1	1	1	1	1	1	1	1
	0	0	-1	-1	-1	-1	-1	-1	-1
	0	0	0	2	2	2	2	2	2
	0	0	0	0	-1	-1	-1	-1	-1
	0	0	0	0	0	1	1	1	1
$y[n]$	0	1	0	2	1	2	2	2	...


GENERAL FIR FILTER

SLIDE a Length- L WINDOW over $x[n]$

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

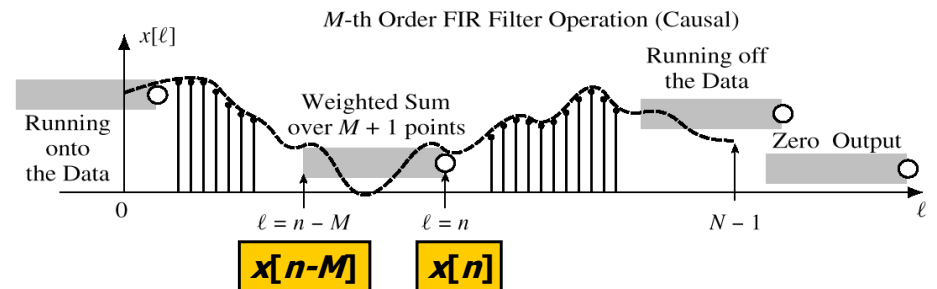

CONVDEMO: MATLAB GUI

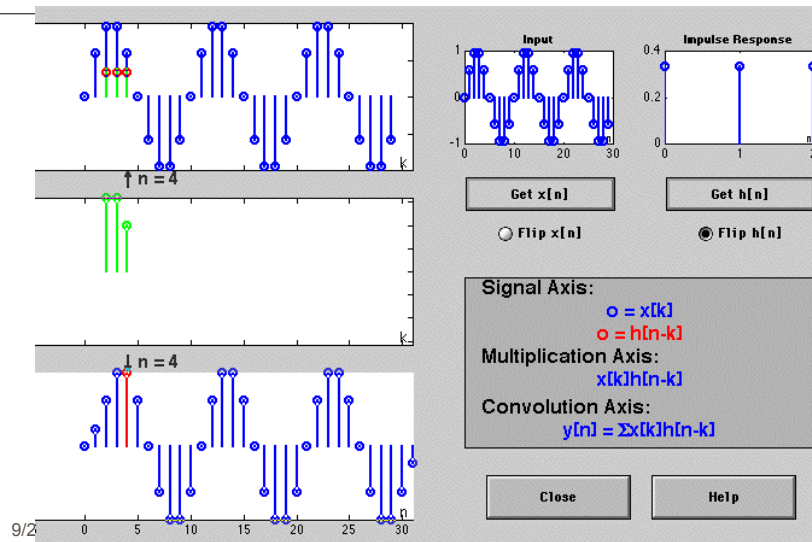


POP QUIZ

- FIR Filter is "FIRST DIFFERENCE"

$$y[n] = x[n] - x[n-1]$$

- INPUT is "UNIT STEP"

$$u[n] = \begin{cases} 1 & \text{for } n \geq 0 \\ 0 & \text{for } n < 0 \end{cases}$$

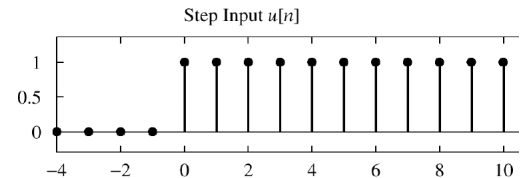

- Find $y[n]$


$$y[n] = u[n] - u[n-1] = \delta[n]$$

9/29/2001

EE-2025 Fall-2001 jMc/rmm

18

HARDWARE STRUCTURES

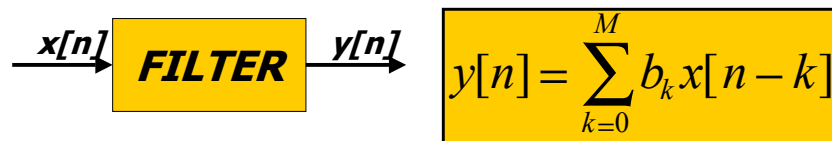

- INTERNAL STRUCTURE of "FILTER"

- WHAT COMPONENTS ARE NEEDED?




- HOW DO WE "HOOK" THEM TOGETHER?

- SIGNAL FLOW GRAPH NOTATION

HARDWARE ATOMS

- Add, Multiply & Store

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

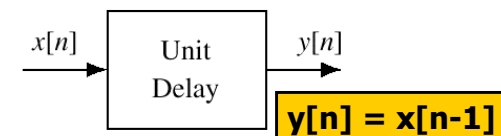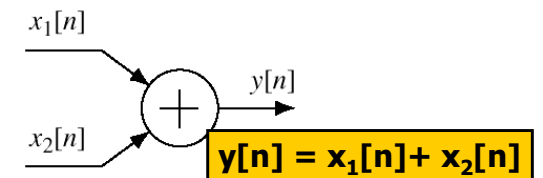

9/29/2001

EE-2025 Fall-2001 jMc/rmm

19

20

FIR STRUCTURE

Direct Form

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

SIGNAL FLOW GRAPH


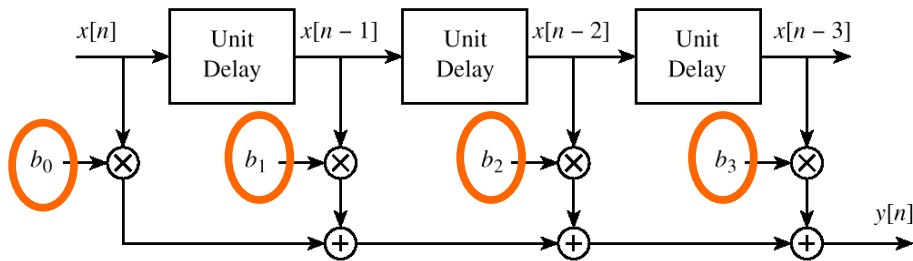


Figure 5.13 Block-diagram structure for the M th order FIR filter.

Moore's Law for TI DSPs



SYSTEM PROPERTIES

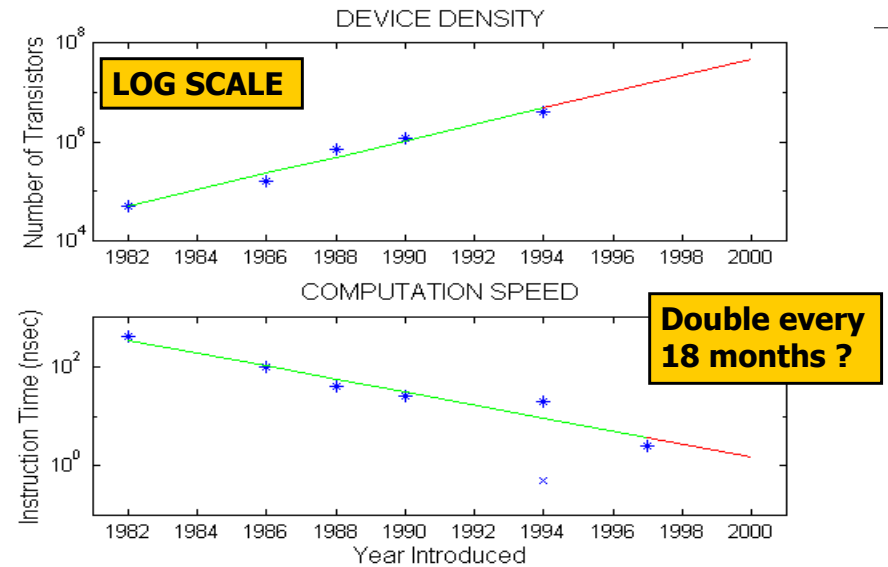

MATHEMATICAL DESCRIPTION

TIME-INVARIANCE

LINEARITY

CAUSALITY

"No output prior to input"

TIME-INVARIANCE

IDEA:

"Time-Shifting the input will cause the same time-shift in the output"

EQUIVALENTLY,

We can prove that

The time origin ($n=0$) is picked arbitrary

TESTING Time-Invariance

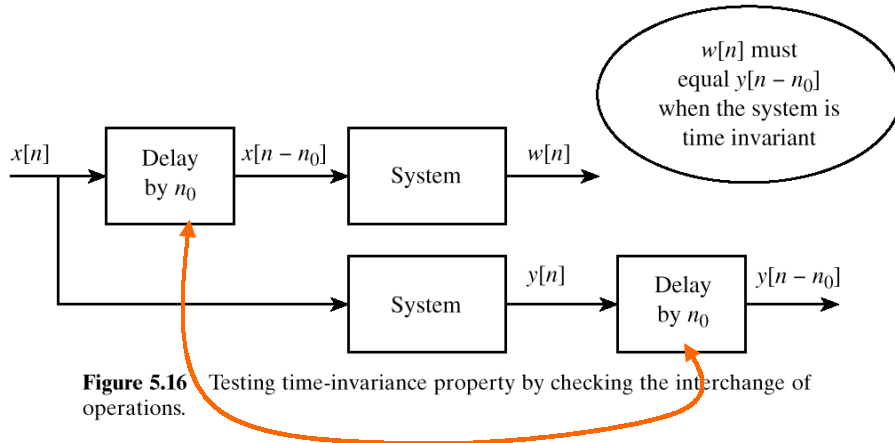


Figure 5.16 Testing time-invariance property by checking the interchange of operations.

9/29/2001

EE-2025 Fall-2001 jMc/rmm

25

LINEAR SYSTEM

- LINEARITY = Two Properties
- SCALING
 - ▮ "Doubling $x[n]$ will double $y[n]$ "
- SUPERPOSITION:
 - ▮ "Adding two inputs gives an output that is the sum of the individual outputs"

9/29/2001

EE-2025 Fall-2001 jMc/rmm

26

TESTING LINEARITY

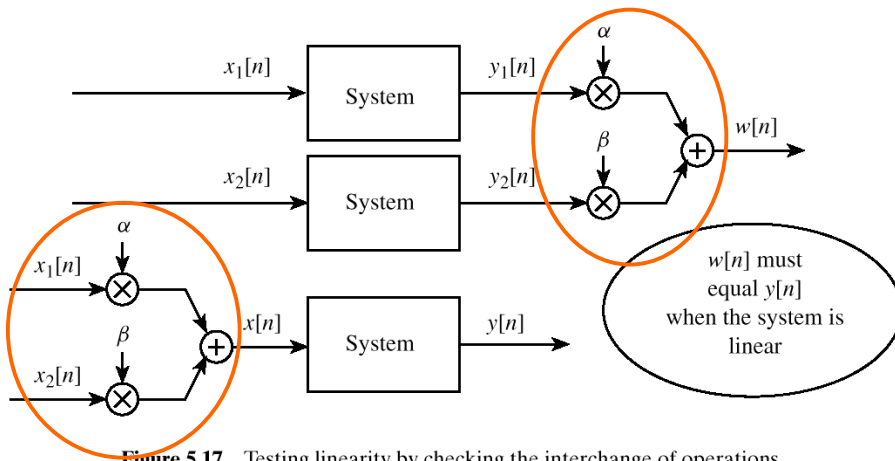


Figure 5.17 Testing linearity by checking the interchange of operations.

9/29/2001

EE-2025 Fall-2001 jMc/rmm

27

LTI SYSTEMS

- LTI: **L**inear & **T**ime-**I**nvariant
- COMPLETELY CHARACTERIZED by:
 - ▮ **IMPULSE RESPONSE** $h[n]$
 - ▮ **CONVOLUTION**: $y[n] = x[n] * h[n]$
 - ▮ The "rule" defining the system can ALWAYS be re-written as convolution
- FIR Example: $h[n]$ is same as b_k

9/29/2001

EE-2025 Fall-2001 jMc/rmm

28

POP QUIZ

- FIR Filter is "FIRST DIFFERENCE"
 - $y[n] = x[n] - x[n-1]$
- Write output as a convolution
 - Need impulse response
- Then, another $h[n] = \delta[n] - \delta[n-1]$ output:

$$y[n] = (\delta[n] - \delta[n-1]) * x[n]$$

CASCADE SYSTEMS

- Does the order of S_1 & S_2 matter?
 - NO, LTI SYSTEMS can be rearranged !!!
 - WHAT ARE THE FILTER COEFFS? $\{b_k\}$

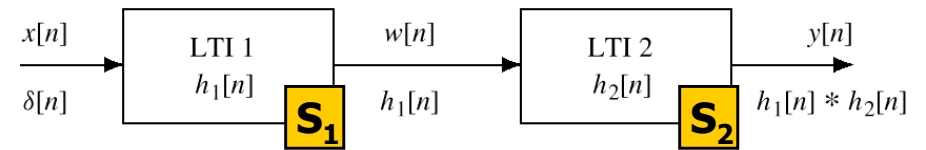


Figure 5.19 A Cascade of Two LTI Systems.

CASCADE EQUIVALENT

- Find "overall" $h[n]$ for a cascade ?

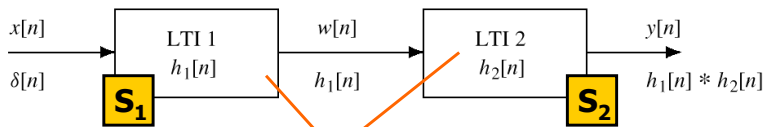


Figure 5.19 A Cascade of Two LTI Systems.





Figure 5.20 Switching the order of cascaded LTI systems.