

PROBLEM FALL-04-F.1:

In each of the following cases, *simplify the expression as much as possible.*


(a) $e^{-2t}\delta(t+3) =$

(b) $u(t-3) * \delta(t-2) =$


(c) $\int_{-10}^5 \cos(10\tau)\delta(\tau-3)d\tau =$

(d) $x[n] = 5\sqrt{2}\cos(0.3\pi n + \pi/4) + 5\cos(0.3\pi n + \pi) =$

PROBLEM FALL-04-F.2:

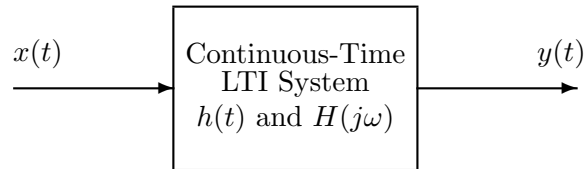

The periodic input to the above LTI system has the Fourier transform $X(j\omega)$ drawn below:

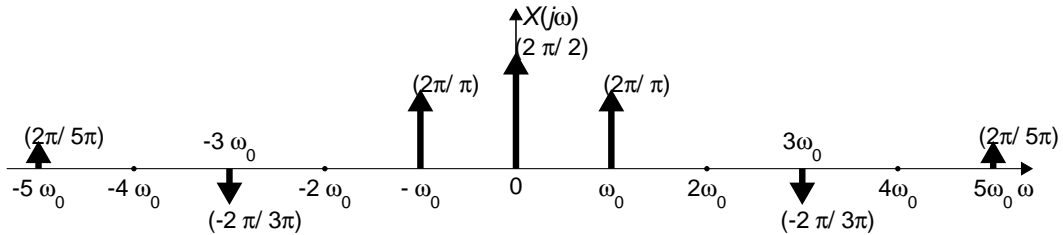


where the dark arrows denote impulses.

- (a) If the frequency response of the filter is given by

$$H(j\omega) = \begin{cases} e^{-j\omega} & \omega_0/2 < |\omega| < 3\omega_0/2 \\ 0 & \text{otherwise} \end{cases}$$

determine $y(t)$. Your answer should be written as a real time function, i.e., there should be no j 's in your answer.


- (b) If $y(t) = x(t) - \frac{1}{2}$ sketch $Y(j\omega)$, the spectrum of $y(t)$, on the axes below.

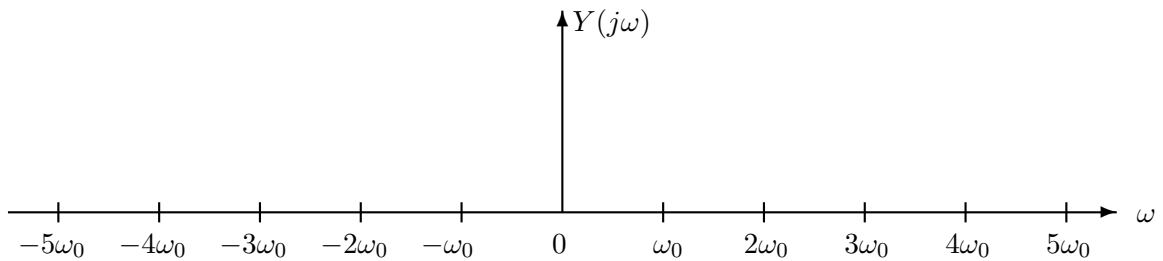

PROBLEM FALL-04-F.3:

The individual parts of this problem are independent.

- (a) If the output from an ideal C/D converter is $x[n] = 33 \cos(0.5\pi n)$, and the sampling rate is 2000 samples/sec, then determine two possible positive values of the input frequency of $x(t)$ that are less than 2000Hz.:

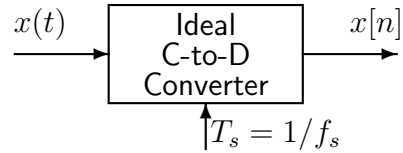

ANS 1: =

ANS 2: =

- (b) Suppose that a student writes the following MATLAB code to generate a sine wave:

```
nn = 0:44100;  
xx = (3/pi) * cos(pi*1.25*nn + pi/3);  
soundsc(xx,fsamp)
```

Although the sinusoid was not written to have a frequency of 2300 Hz, it is possible to play out the vector **xx** so that it sounds like a 2300 Hz tone. Determine the value of **fsamp** that should be used to play the vector **xx** as a 2300 Hz tone. Write your answer as an integer.


fsamp = Hz

- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by:
 $x(t) = \Im\{e^{-j1200\pi t} + e^{j2000\pi t}\}.$

ANS = samples/sec.

PROBLEM FALL-04-F.4:

Consider the following system for discrete-time filtering of a continuous-time signal:

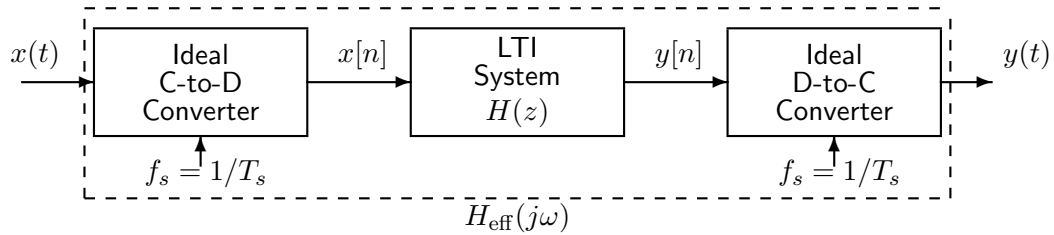


Assume that the discrete-time system is implemented using the MATLAB command:

```
yy=firfilt([0,1,0,-1],xx)
```

where **xx** is an array of samples of $x[n]$ and **yy** holds samples of $y[n]$.

- (a) Determine the frequency response of the discrete-time filter and plot its magnitude response versus frequency:

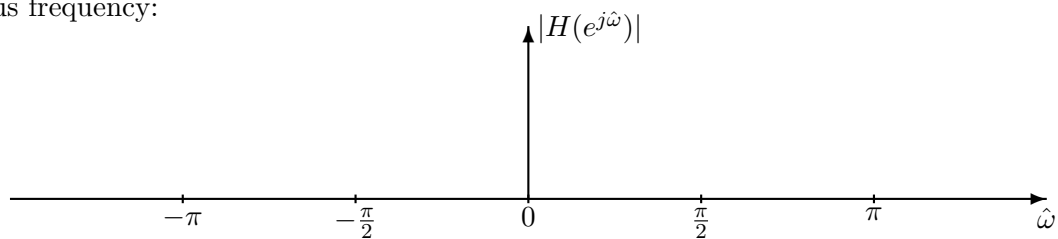

- (b) Assume that the input signal $x(t)$ is a sum of cosines:



$$x(t) = 8 \cos(960\pi t + \pi/3) + 5 \cos(600\pi t - \pi/4)$$

For this input signal, determine the output signal $y(t)$ when the sampling rate is $f_s = 480$ **samples/sec**. Your answer should be expressed as a sum of cosines.



PROBLEM FALL-04-F.5:

The parts of this problem are completely independent.



(a) Given that $y(t) = x(t) * h(t)$, find $h(t)$. $h(t) =$

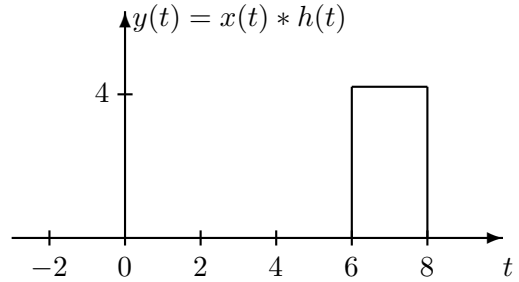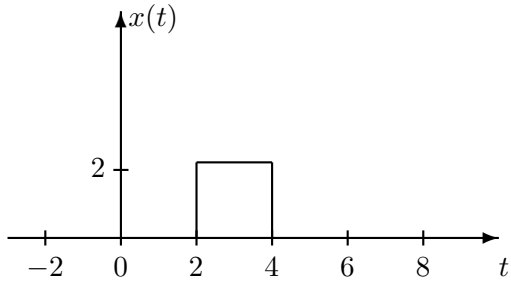

(b) If $h(t) = u(t)$, plot $y(t) = x(t) * h(t)$ on the graph on the right. *Be sure to label the y(t) axis.*

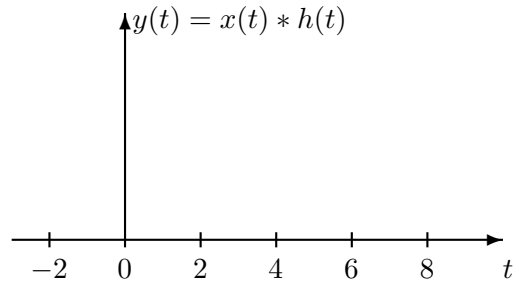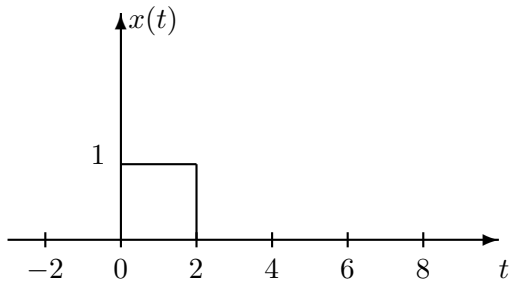

(c) If $h(t) = u(t - 1) - u(t - 3)$ and $y(t) = x(t) * h(t)$, determine the values of a , b , and c in the graph of $x(t)$ on the left, if $y(t)$ is given by the graph on the right.

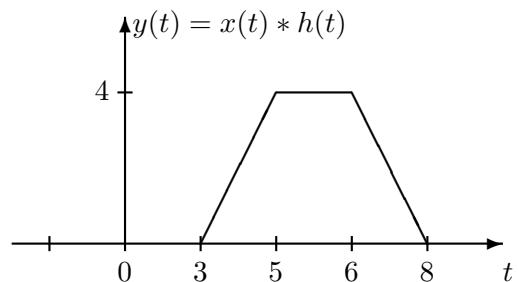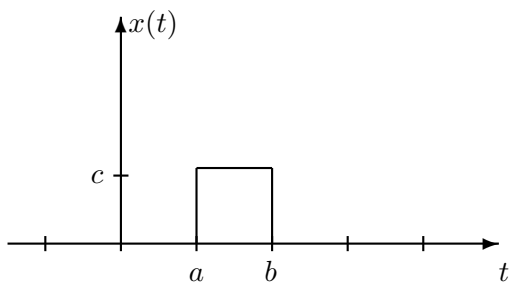


$a =$

$b =$

$c =$


PROBLEM FALL-04-F.6:

- (a) Consider the signal $x(t) = \frac{\sin(5\pi t)}{2\pi t}$. Make a carefully labeled sketch of $x(t)$ in the space below.

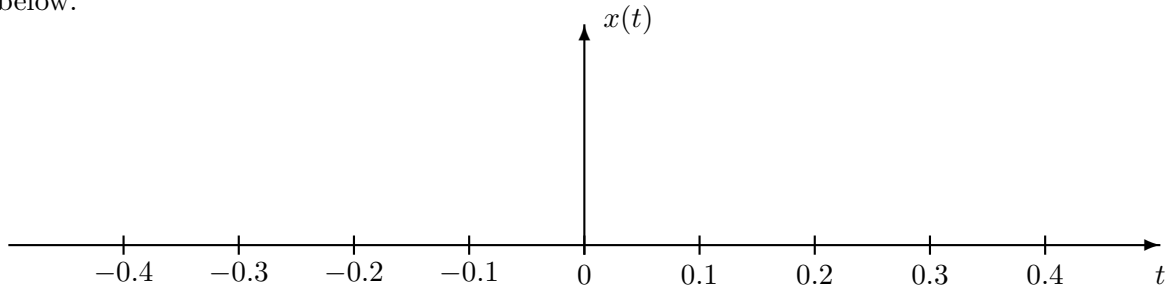

- (b) Determine the Fourier transform of $y(t) = x(0.2 - t)$, using $x(t)$ from part (a).

- (c) Now consider the periodic signal $p(t)$ plotted below:

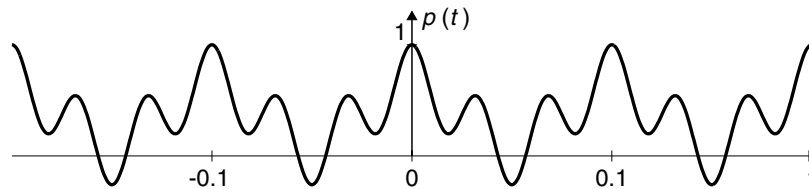


The Fourier series for this input can be simplified to the following form:

$$p(t) = \frac{1}{2} + \frac{2}{\pi} \cos(\omega_0 t) + \frac{2}{\pi} \cos(3\omega_0 t)$$

$\omega_0 =$ _____ rad/sec


First determine the value of ω_0 and put your result in the box. Then, **either** write an equation for $P(j\omega)$, the Fourier transform of $p(t)$, in the space below, **or** plot it on the axes below. **You must label your plot carefully to receive full credit.**

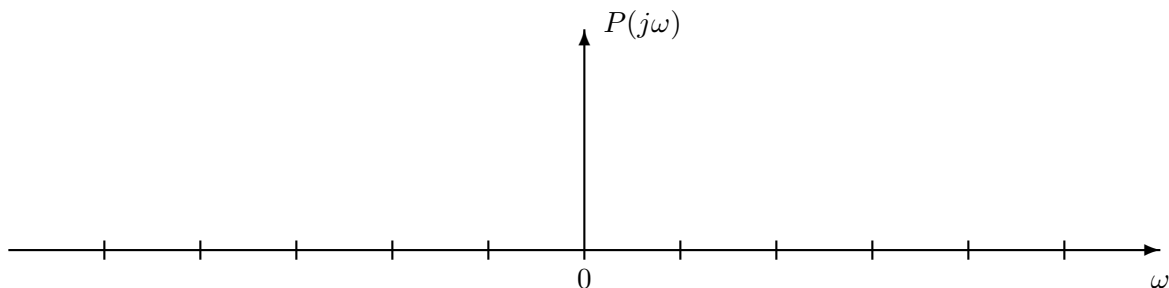


PROBLEM FALL-04-F.7:

The two parts of this problem are independent.


- (a) The system below is proposed as an alternative speech scrambler to the one in lab. Notice that the carrier signal is a sine instead of a cosine.

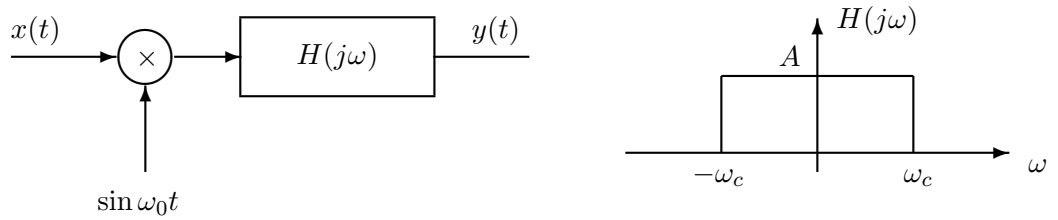


Assume that $x(t)$ has the spectrum, $X(j\omega)$ shown below

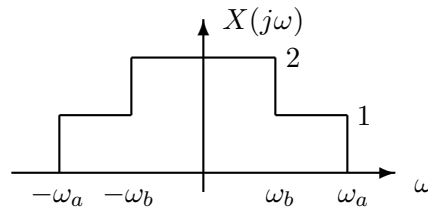



Sketch the spectrum, $Y(j\omega)$ of the output of the scrambler on the axes below if $\omega_a/(2\pi) = 5$ kHz, $\omega_b/(2\pi) = 2$ kHz, $\omega_c/(2\pi) = 10$ kHz, and $\omega_0/(2\pi) = 10$ kHz. Be sure to LABEL YOUR PLOT.

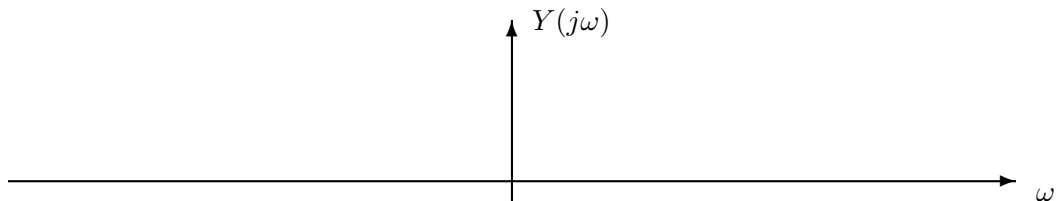

- (b) Signals are often repeatedly moved from one portion of the spectrum to another by repeated mixing. This process is called **heterodyning**. A simple example is the cascade of two mixers shown below.

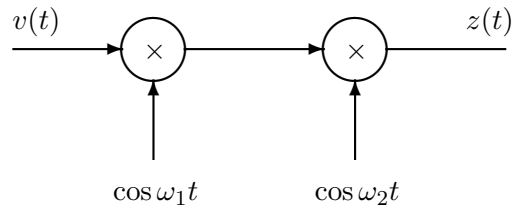

Let $f_1 = \omega_1/(2\pi) = 45$ kHz and $f_2 = \omega_2/(2\pi) = 10$ kHz. Sketch the spectrum $Z(j\omega)$ assuming that $V(j\omega)$ has the shape shown in the figure below.

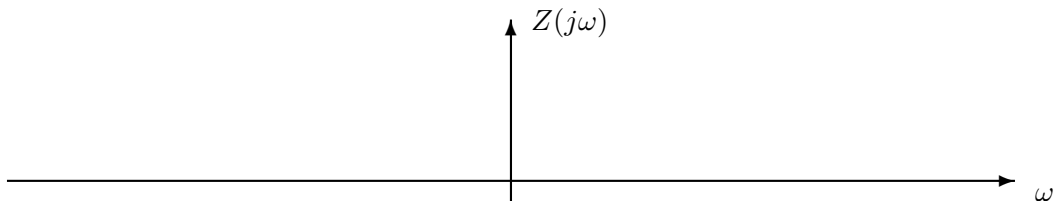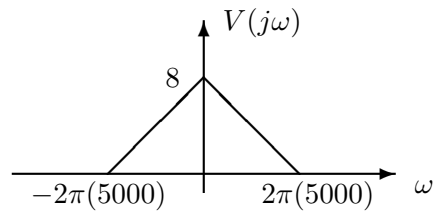

PROBLEM FALL-04-F.8:

A discrete-time system is defined by the following system function:

$$H(z) = H(z) = \frac{0.49 - z^{-2}}{1 + 0.49z^{-2}}.$$


- (a) Write down the difference equation that is satisfied by the input $x[n]$ and output $y[n]$ of the system.

- (b) Fill in numbers for the vectors **bb** and **aa** in the following MATLAB computation of the frequency response of the system:

```
bb=[          ]; aa=[          ];  
yy=filter(bb,aa,xx)
```

where **xx** is the input signal to be filtered.

- (c) Determine *all* the poles and zeros of $H(z)$ and plot them in the z -plane.

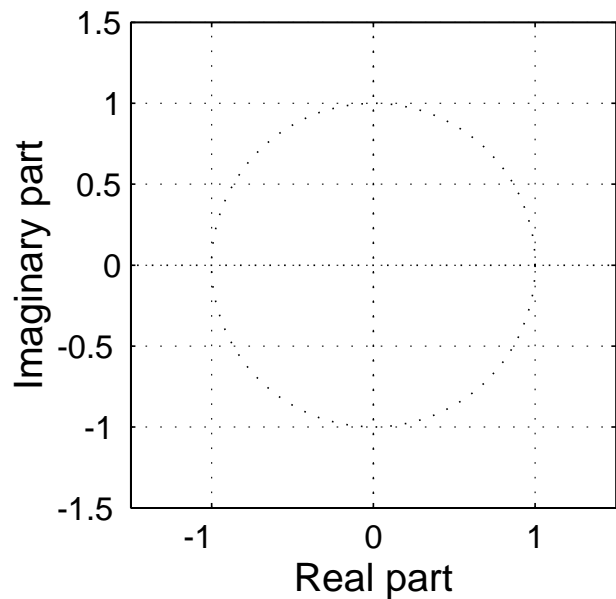

- (d) Make a sketch of the magnitude of the frequency response of the system over the range $-\pi < \hat{\omega} \leq \pi$. Indicate where the peaks and valleys are located, and also determine the height of the peaks and the valleys.

PROBLEM FALL-04-F.1:

In each of the following cases, *simplify the expression as much as possible.*


(a) $e^{-2t}\delta(t+3) = \boxed{e^6\delta(t+3)}$

(b) $u(t-3) * \delta(t-2) = \boxed{u(t-5)}$

(c) $\int_{-10}^5 \cos(10\tau)\delta(\tau-3)d\tau = \boxed{\cos(30)}$

(d) $x[n] = 5\sqrt{2}\cos(0.3\pi n + \pi/4) + 5\cos(0.3\pi n + \pi) = \boxed{5\cos(0.3\pi n + \pi/2)}$


\downarrow $X_1 = 5\sqrt{2}e^{j\pi/4}$ \downarrow $X_2 = 5e^{j\pi}$

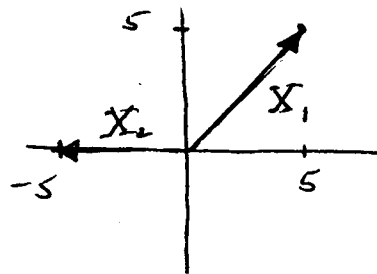


$X_1 + X_2 = 5e^{j\pi/2}$

$x[n] = 5\cos(0.3\pi n + \pi/2)$

PROBLEM FALL-04-F.2:

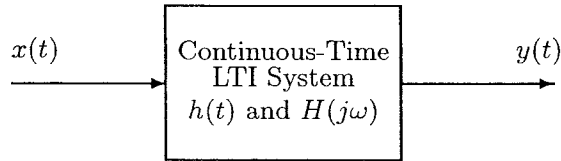

The periodic input to the above LTI system has the Fourier transform $X(j\omega)$ drawn below:

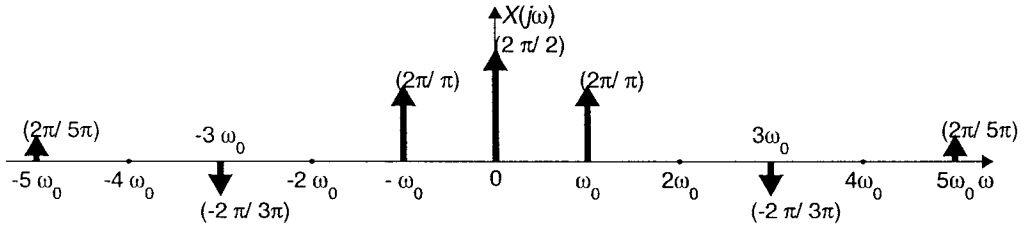

where the dark arrows denote impulses.


- (a) If the frequency response of the filter is given by

$$H(j\omega) = \begin{cases} e^{-j\omega} & \omega_0/2 < |\omega| < 3\omega_0/2 \\ 0 & \text{otherwise} \end{cases}$$

determine $y(t)$. Your answer should be written as a real time function, i.e., there should be no j 's in your answer.

$$\begin{aligned} y(t) &= \frac{1}{\pi} e^{j\omega_0 t} e^{-j\omega_0} + \frac{1}{\pi} e^{-j\omega_0 t} e^{j\omega_0} \\ &= \frac{2}{\pi} \cos \omega_0(t-1) \end{aligned}$$


- (b) If $y(t) = x(t) - \frac{1}{2}$ sketch $Y(j\omega)$, the spectrum of $y(t)$, on the axes below.

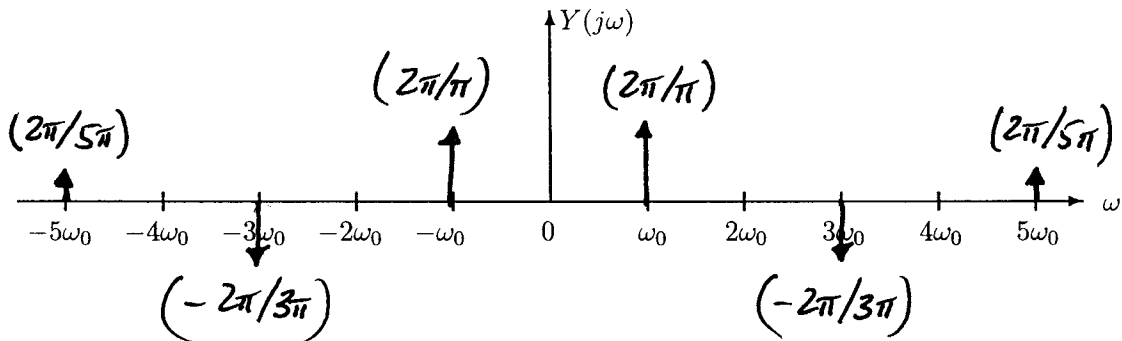

PROBLEM FALL-04-F.3:

The individual parts of this problem are independent.

- (a) If the output from an ideal C/D converter is $x[n] = 33 \cos(0.5\pi n)$, and the sampling rate is 2000 samples/sec, then determine two possible positive values of the input frequency of $x(t)$ that are less than 2000 Hz.:

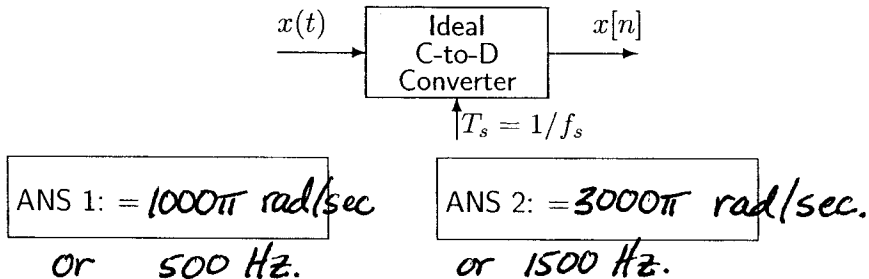

- (b) Suppose that a student writes the following MATLAB code to generate a sine wave:

```
nn = 0:44100;
xx = (3/pi) * cos(pi*1.25*nn + pi/3);
soundsc(xx,fsamp)
```

Although the sinusoid was not written to have a frequency of 2300 Hz, it is possible to play out the vector `xx` so that it sounds like a 2300 Hz tone. Determine the value of `fsamp` that should be used to play the vector `xx` as a 2300 Hz tone. Write your answer as an integer.

`fsamp = 6,133` Hz

$$\hat{\omega} = \omega T_s \quad \frac{5\pi}{4} \equiv \frac{5\pi}{4} - 2\pi = -\frac{3\pi}{4}$$

$$\frac{3\pi}{4} = 2\pi(2300)T_s$$

$$\frac{1}{T_s} = \frac{18400}{3} = 6,133$$

- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by:
 $x(t) = \Im\{e^{-j1200\pi t} + e^{j2000\pi t}\}$.


ANS = 2,000 samples/sec.

$$\omega_b = 2000\pi$$

$$f_b = 1000 \text{ Hz.}$$

PROBLEM FALL-04-F.4:

Consider the following system for discrete-time filtering of a continuous-time signal:

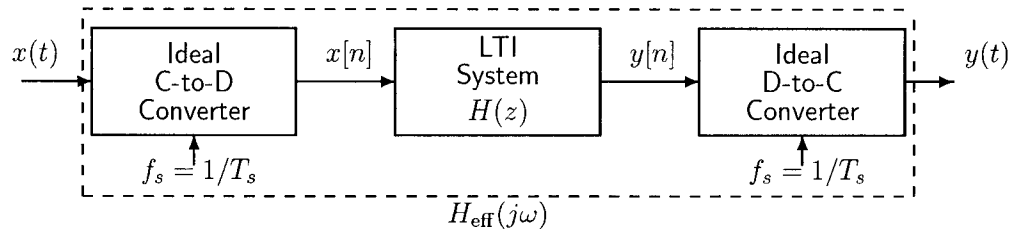


Assume that the discrete-time system is implemented using the MATLAB command:

```
yy=firfilt([0,1,0,-1],xx)
```

where xx is an array of samples of $x[n]$ and yy holds samples of $y[n]$.

- (a) Determine the frequency response of the discrete-time filter and plot its magnitude response versus frequency:

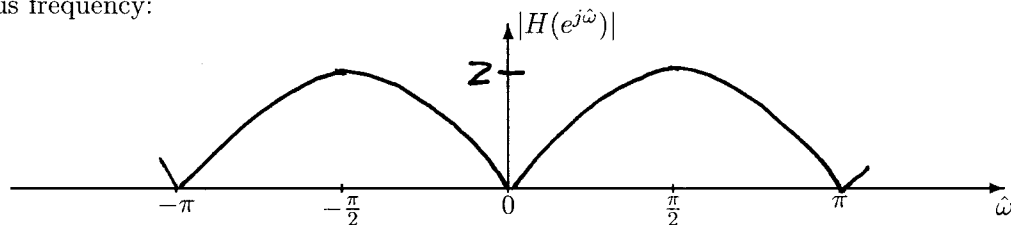

$$H(e^{j\hat{\omega}}) = e^{-j\hat{\omega}} - e^{-j3\hat{\omega}}$$

$$= e^{-j2\hat{\omega}}(e^{j\hat{\omega}} - e^{-j\hat{\omega}}) = j2 \sin \hat{\omega} e^{-j2\hat{\omega}}$$

- (b) Assume that the input signal $x(t)$ is a sum of cosines:

$$x(t) = 8 \cos(960\pi t + \pi/3) + 5 \cos(600\pi t - \pi/4)$$

For this input signal, determine the output signal $y(t)$ when the sampling rate is $f_s = 480$ samples/sec. Your answer should be expressed as a sum of cosines.

$$x[n] = 8 \cos\left(\frac{960\pi n}{480} + \frac{\pi}{3}\right) + 5 \cos\left(\frac{600\pi n}{480} - \frac{\pi}{4}\right)$$

$$= 8 \cos\left(\frac{\pi}{3}\right) + 5 \cos\left(\frac{5\pi}{4}n - \frac{\pi}{4}\right)$$

$$= 4 + 5 \cos\left(\frac{3\pi}{4}n + \frac{\pi}{4}\right)$$

$$\Rightarrow y[n] = 0 + 5\sqrt{2} \cos\left(\frac{3\pi}{4}n - \pi + \frac{\pi}{4}\right)$$

$$= 5\sqrt{2} \cos\left(\frac{3\pi}{4}n - \frac{3\pi}{4}\right)$$



$$y(t) = 5\sqrt{2} \cos\left(360\pi t - \frac{3\pi}{4}\right)$$

PROBLEM FALL-04-F.5:



The parts of this problem are completely independent.

(a) Given that $y(t) = x(t) * h(t)$, find $h(t)$.



$h(t) = 2\delta(t-4)$

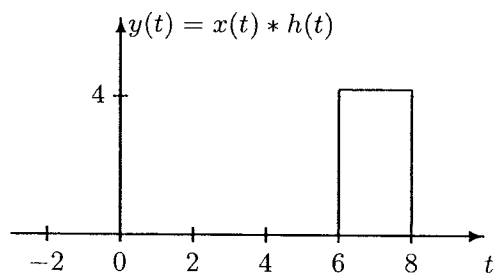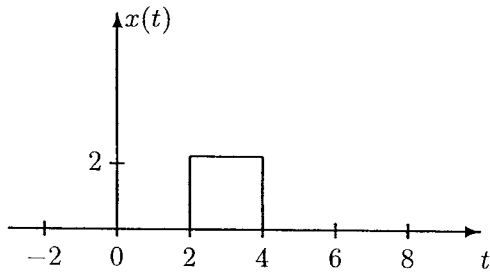

(b) If $h(t) = u(t)$, plot $y(t) = x(t) * h(t)$ on the graph on the right. Be sure to label the $y(t)$ axis.

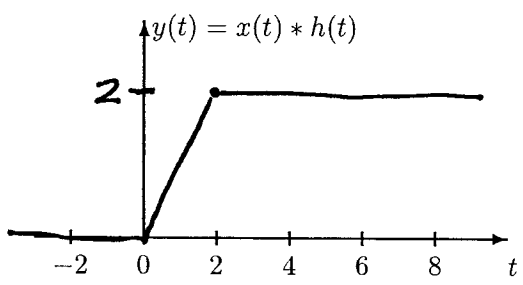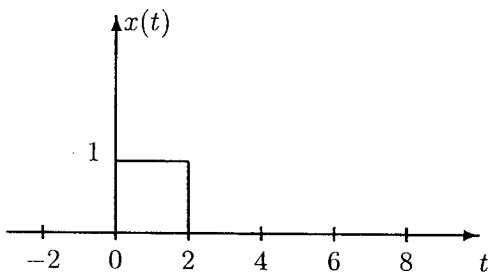

(c) If $h(t) = u(t-1) - u(t-3)$ and $y(t) = x(t) * h(t)$, determine the values of a , b , and c in the graph of $x(t)$ on the left, if $y(t)$ is given by the graph on the right.

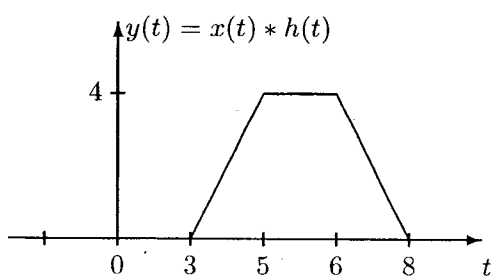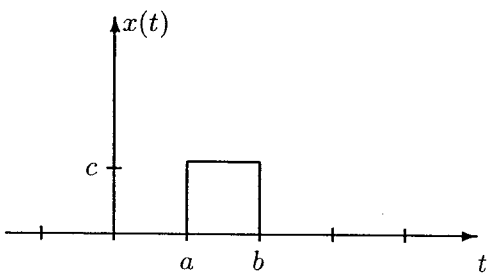


$a = 2$

$b = 5$

$c = 2$

PROBLEM FALL-04-F.6:

- (a) Consider the signal $x(t) = \frac{\sin(5\pi t)}{2\pi t}$. Make a carefully labeled sketch of $x(t)$ in the space below.

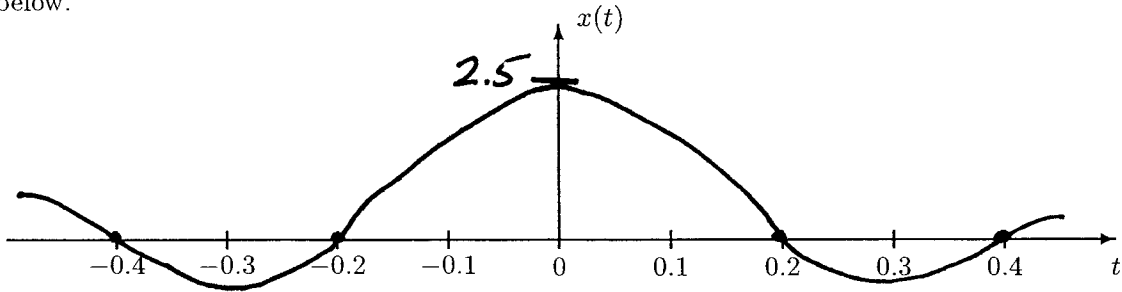


- (b) Determine the Fourier transform of $y(t) = x(0.2 - t)$, using $x(t)$ from part (a).

APPLY SHIFT PROPERTY BY SHIFT OF 0.2, THEN SCALING PROPERTY WITH $a = -1$

$$Y(j\omega) = \begin{cases} \frac{1}{2} e^{-j(0.2\omega)} & , \quad |\omega| < 5\pi \\ 0 & , \quad |\omega| > 5\pi \end{cases}$$

- (c) Now consider the periodic signal $p(t)$ plotted below:

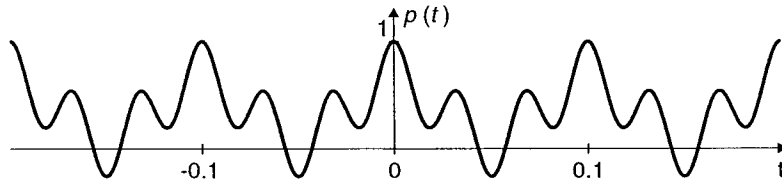


The Fourier series for this input can be simplified to the following form:

$$p(t) = \frac{1}{2} + \frac{2}{\pi} \cos(\omega_0 t) + \frac{2}{\pi} \cos(3\omega_0 t)$$

$\omega_0 = \underline{20\pi} \text{ rad/sec}$

First determine the value of ω_0 and put your result in the box. Then, **either** write an equation for $P(j\omega)$, the Fourier transform of $p(t)$, in the space below, **or** plot it on the axes below. You must label your plot carefully to receive full credit.


$$P(j\omega) = \pi \delta(\omega) + 2\delta(\omega - 20\pi) + 2\delta(\omega - 60\pi) + 2\delta(\omega + 20\pi) + 2\delta(\omega + 60\pi)$$

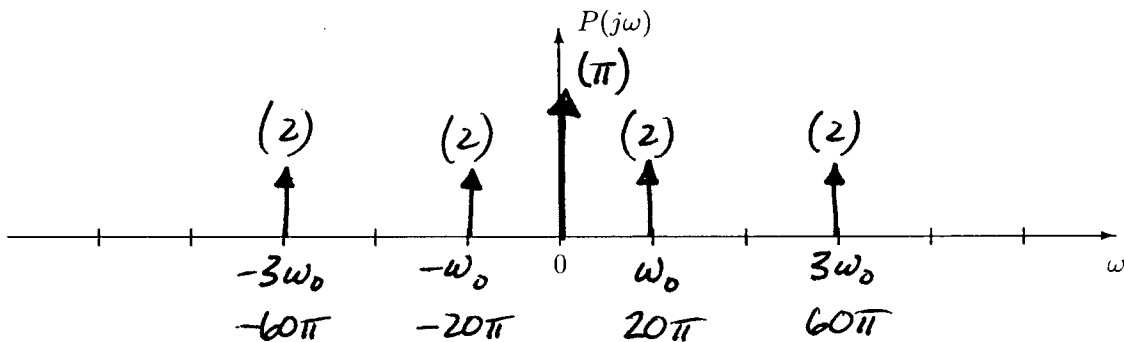


PROBLEM FALL-04-F.7:

The two parts of this problem are independent.


- (a) The system below is proposed as an alternative speech scrambler to the one in lab. Notice that the carrier signal is a sine instead of a cosine..

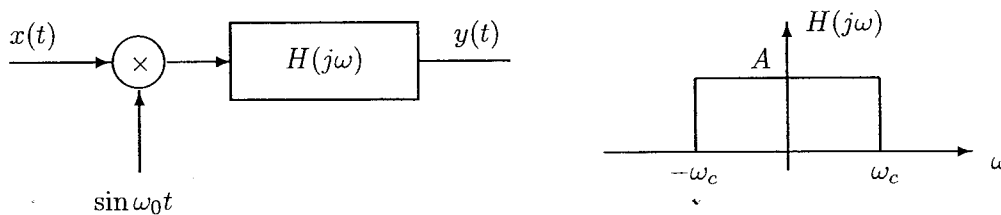


Assume that $x(t)$ has the spectrum, $X(j\omega)$ shown below

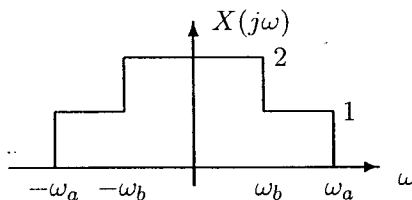



Sketch the spectrum, $Y(j\omega)$ of the output of the scrambler on the axes below if $\omega_a/(2\pi) = 5$ kHz, $\omega_b/(2\pi) = 2$ kHz, $\omega_c/(2\pi) = 10$ kHz, and $\omega_0/(2\pi) = 10$ kHz. Be sure to LABEL YOUR PLOT.

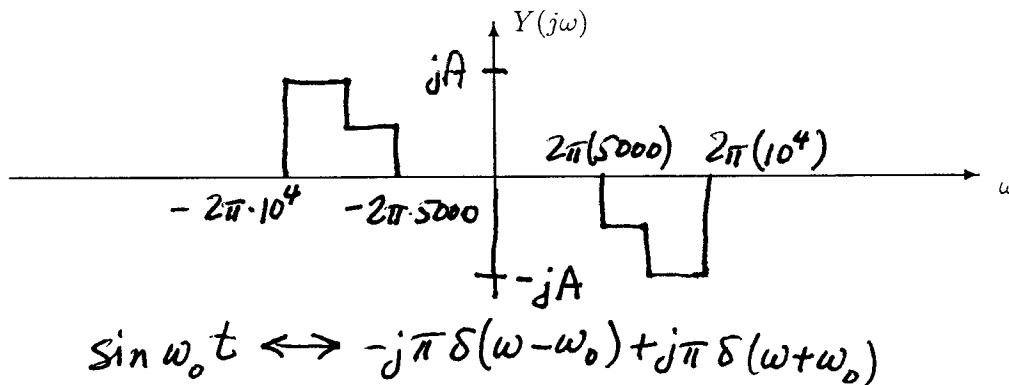

- (b) Signals are often repeatedly moved from one portion of the spectrum to another by repeated mixing. This process is called **heterodyning**. A simple example is the cascade of two mixers shown below.

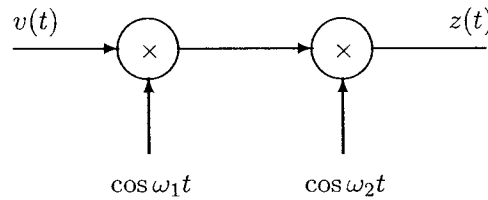

Let $f_1 = \omega_1/(2\pi) = 45$ kHz and $f_2 = \omega_2/(2\pi) = 10$ kHz. Sketch the spectrum $Z(j\omega)$ assuming that $V(j\omega)$ has the shape shown in the figure below.

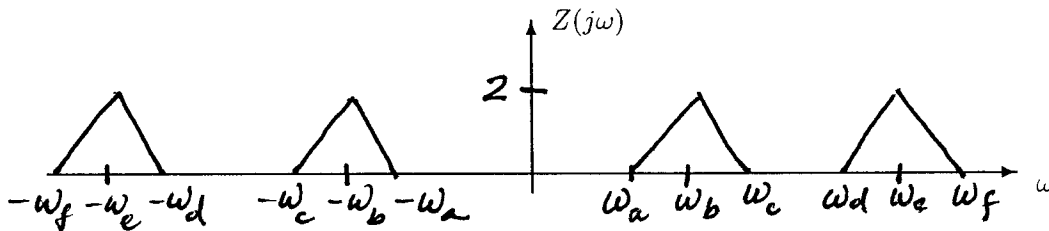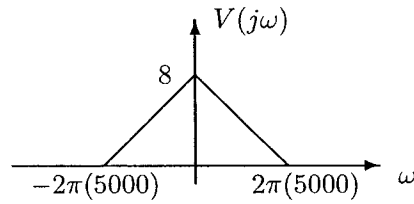

$$\begin{aligned}\omega_b &= \omega_1 - \omega_2 = 2\pi(35,000) \\ \omega_e &= \omega_1 + \omega_2 = 2\pi(55,000) \\ \omega_a &= \omega_b - 2\pi(5000) = 2\pi(30,000) \\ \omega_c &= \omega_b + 2\pi(5000) = 2\pi(40,000) \\ \omega_d &= \omega_e - 2\pi(5000) = 2\pi(50,000) \\ \omega_f &= \omega_e + 2\pi(5000) = 2\pi(60,000)\end{aligned}$$

PROBLEM FALL-04-F.8:

A discrete-time system is defined by the following system function:

$$H(z) = \frac{0.49 - z^{-2}}{1 + 0.49z^{-2}}$$

- (a) Write down the difference equation that is satisfied by the input $x[n]$ and output $y[n]$ of the system.


$$y[n] = -0.49y[n-2] + 0.49x[n] - x[n-2]$$

- (b) Fill in numbers for the vectors `bb` and `aa` in the following MATLAB computation of the frequency response of the system:

```
bb=[0.49, 0, -1 ];    aa=[ 1, 0, 0.49 ];
yy=filter(bb,aa,xx)
```

where `xx` is the input signal to be filtered.

- (c) Determine *all* the poles and zeros of $H(z)$ and plot them in the z -plane.

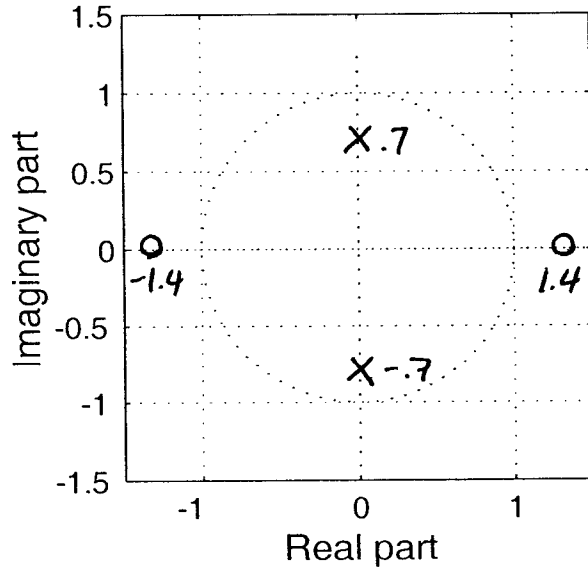

- (d) Make a sketch of the magnitude of the frequency response of the system over the range $-\pi < \omega \leq \pi$. Indicate where the peaks and valleys are located, and also determine the height of the peaks and the valleys.

