



US008314354B2

(12) **United States Patent**
Prest et al.

(10) **Patent No.:** **US 8,314,354 B2**
(45) **Date of Patent:** **Nov. 20, 2012**

(54) **ACCESSORY CONTROLLER FOR ELECTRONIC DEVICES**
(75) Inventors: **Christopher D. Prest**, San Francisco, CA (US); **Claudio Di Leo**, Cambridge, MA (US); **Jahan Minoo**, South San Francisco, CA (US)

RE35,536 E 6/1997 Irissou et al.
5,649,307 A 7/1997 Patino
5,701,355 A 12/1997 Brannan et al.
5,898,147 A 4/1999 Domzalski et al.
6,122,369 A 9/2000 Hwang et al.
6,271,487 B1 8/2001 Domzalski et al.
6,745,014 B1 6/2004 Seibert et al.
6,988,905 B2 1/2006 Corey et al.

(Continued)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 360 days.

FOREIGN PATENT DOCUMENTS

CN 2372858 4/2000

(Continued)

(21) Appl. No.: **12/703,172**

(22) Filed: **Feb. 9, 2010**

OTHER PUBLICATIONS

Lin et al., U.S. Appl. No. 12/203,866, filed Sep. 3, 2008.

(Continued)

(65) **Prior Publication Data**
US 2011/0194710 A1 Aug. 11, 2011

Related U.S. Application Data

(60) Provisional application No. 61/228,939, filed on Jul. 27, 2009, provisional application No. 61/230,073, filed on Jul. 30, 2009, provisional application No. 61/232,374, filed on Aug. 7, 2009.

Primary Examiner — Edwin A. Leon

(74) *Attorney, Agent, or Firm* — Kramer Levin Naftalis & Frankel LLP



(51) **Int. Cl.**
H01H 5/18 (2006.01)
(52) **U.S. Cl.** **200/406**
(58) **Field of Classification Search** 439/632,
439/676, 669; 200/1 B, 1 R, 5 A, 5 B, 18,
200/275, 406, 512–517
See application file for complete search history.

(57) **ABSTRACT**

Accessories such as headsets for electronic devices are provided. A headset may be provided with a button controller assembly that has user-actuated buttons and a microphone. The microphone may be formed by mounting a microphone transducer on a printed circuit board. A housing may be mounted over the transducer to form a sealed cavity for the transducer. Circuitry may be mounted on portions of the printed circuit board that extend beyond the edges of the microphone housing. The button controller assembly may have dome switches. The dome switches may have a housing that encloses dome switch components and that forms a structural internal part for the button controller. The dome switch housing structure may have tabs or other engagement features that mate with corresponding engagement features in a button member. The button member may be pressed by a user to actuate a desired dome switch.

(56) **References Cited**
U.S. PATENT DOCUMENTS
3,052,785 A 9/1962 Herrmann et al.
3,436,495 A 4/1969 Gorike
4,479,112 A 10/1984 Hirsch
4,731,833 A * 3/1988 Gumb et al. 379/413.04

18 Claims, 22 Drawing Sheets

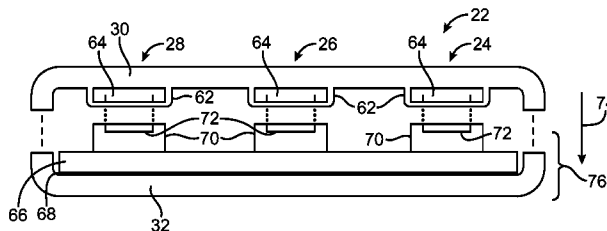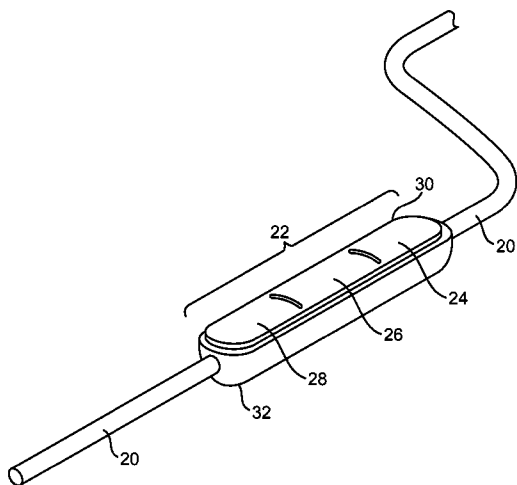

U.S. PATENT DOCUMENTS

7,110,799	B1	9/2006	Willins et al.	
7,166,910	B2	1/2007	Minervini	
7,349,546	B2	3/2008	Ganton	
7,532,732	B2 *	5/2009	Denninghoff	381/309
7,652,888	B2 *	1/2010	Bohlinger et al.	361/732
2001/0053228	A1	12/2001	Jones	
2003/0198355	A1	10/2003	Hong	
2005/0201568	A1	9/2005	Goyal	
2005/0272401	A1	12/2005	Zatezalo et al.	
2006/0009868	A1	1/2006	Park	
2007/0004472	A1	1/2007	Gitzinger	
2007/0049103	A1	3/2007	Kashi	
2007/0178947	A1	8/2007	Kim	
2007/0225049	A1	9/2007	Andrada	
2008/0032753	A1	2/2008	Nho	
2008/0039072	A1	2/2008	Bloebaum	
2008/0164994	A1	7/2008	Johnson et al.	
2008/0166003	A1	7/2008	Hankey et al.	
2009/0179768	A1	7/2009	Sander et al.	

FOREIGN PATENT DOCUMENTS

CN	200966132	10/2007
CN	201018635	2/2008
EP	1 542 250	6/2005
EP	1 986 205	10/2008
WO	9957937	11/1999
WO	02/45463	6/2002
WO	03056790	7/2003
WO	2008085915	7/2008
WO	2008085929	7/2008

OTHER PUBLICATIONS

“TRS connector” Wikipedia, [online], retrieved Jul. 28, 2008, <http://en.wikipedia.org/wiki/TRS_connector>.

* cited by examiner

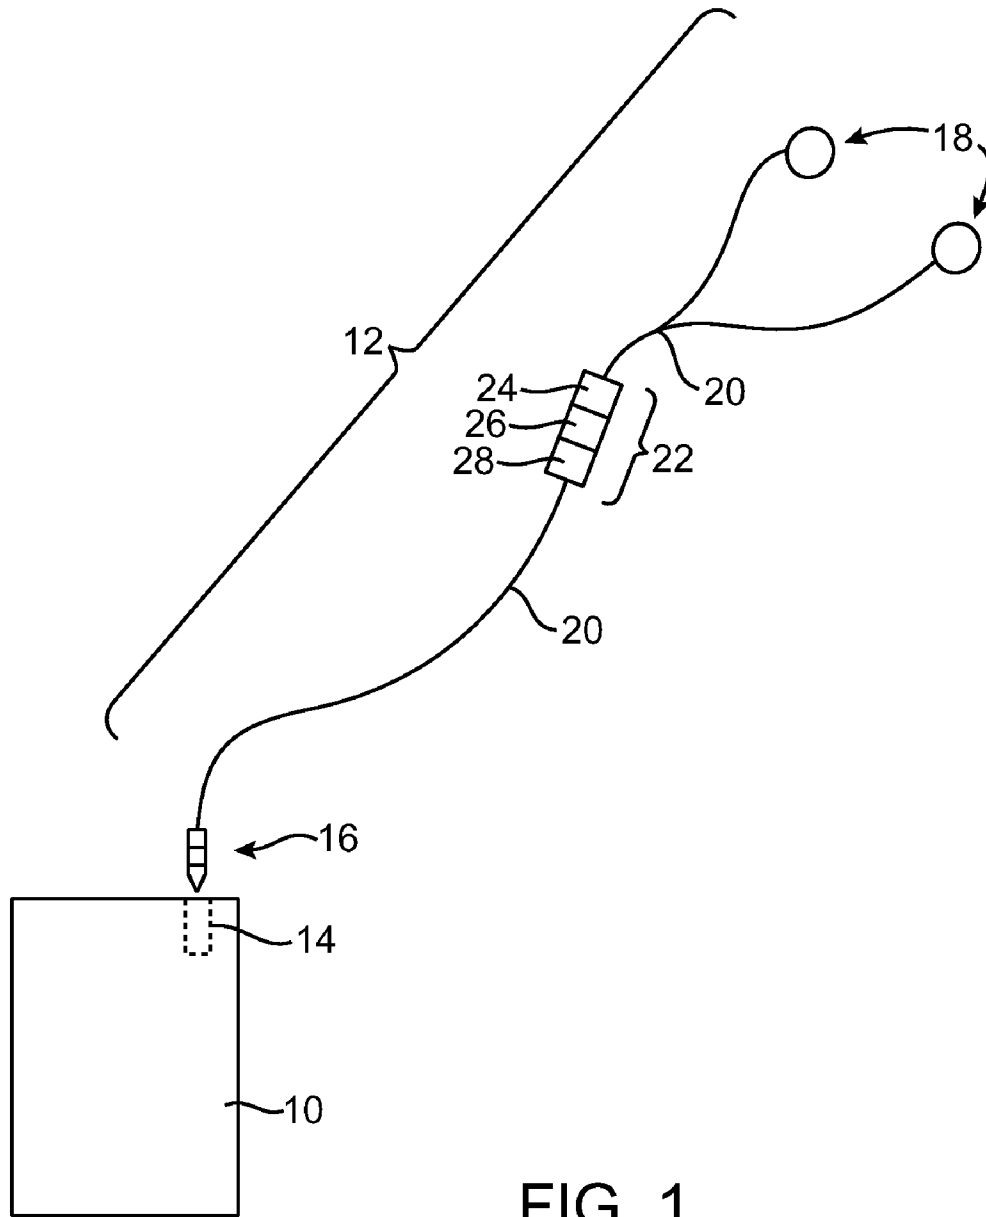


FIG. 1

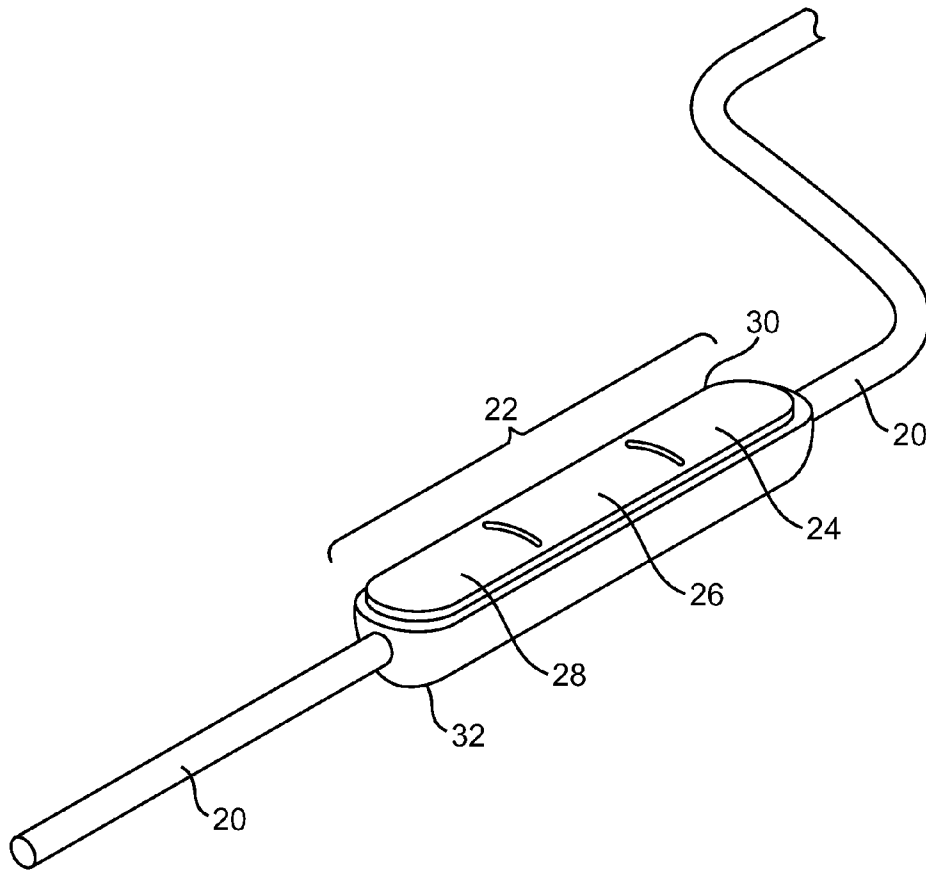


FIG. 2

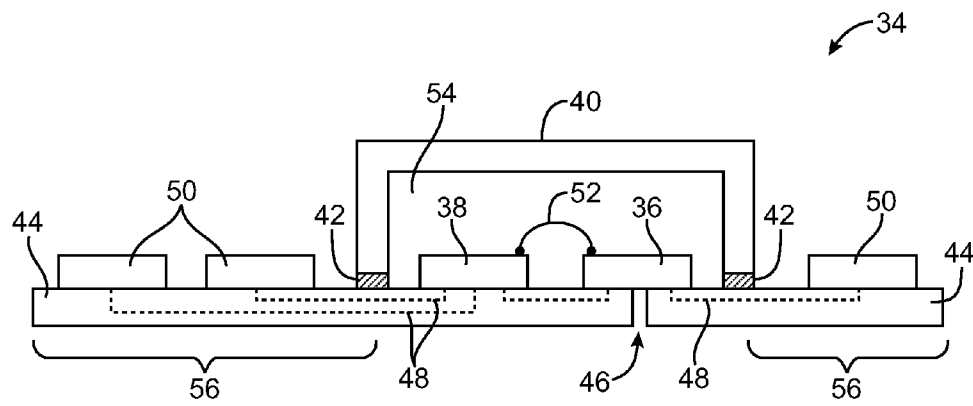


FIG. 3

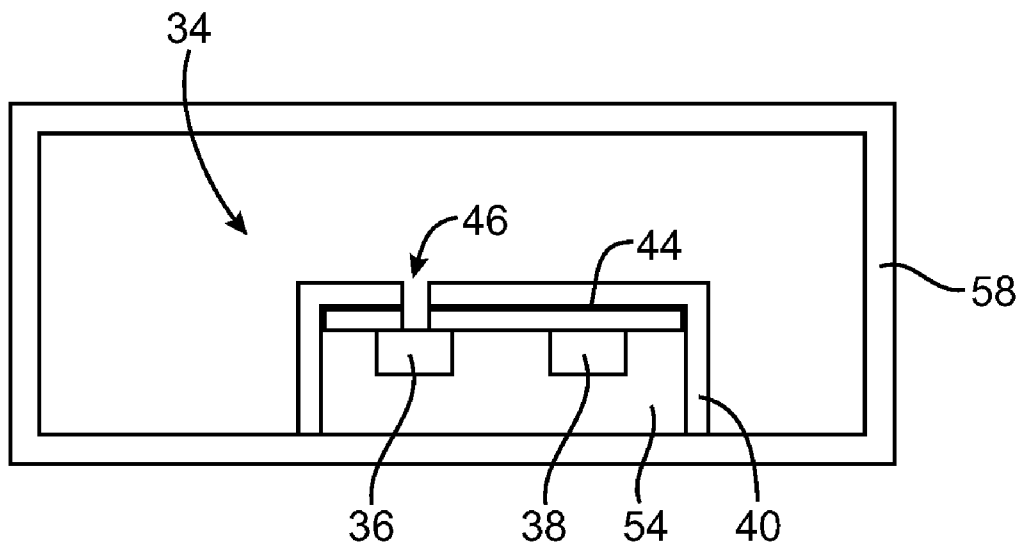


FIG. 4

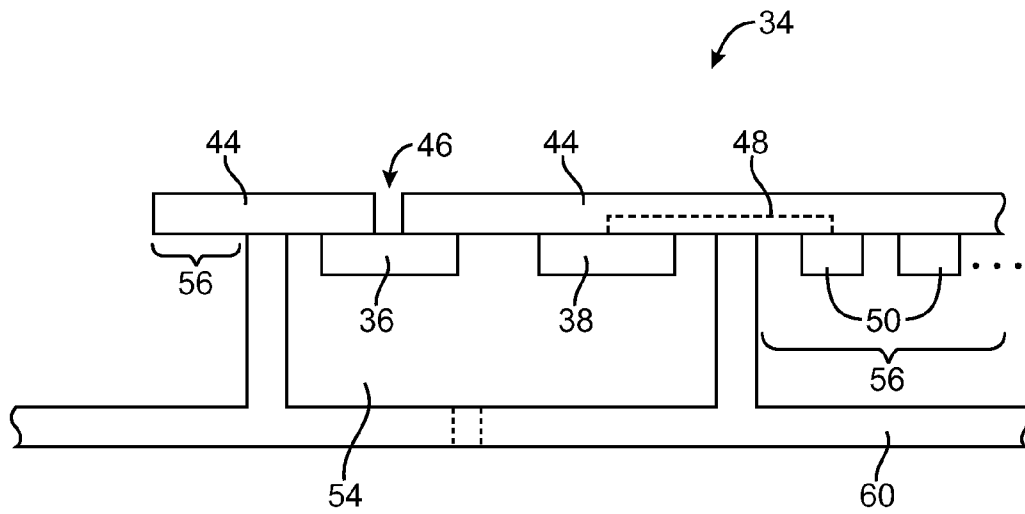


FIG. 5

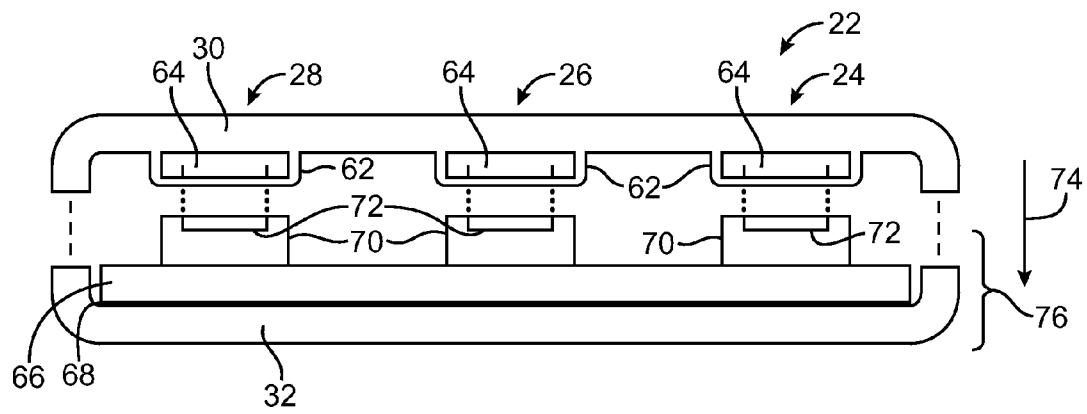


FIG. 6

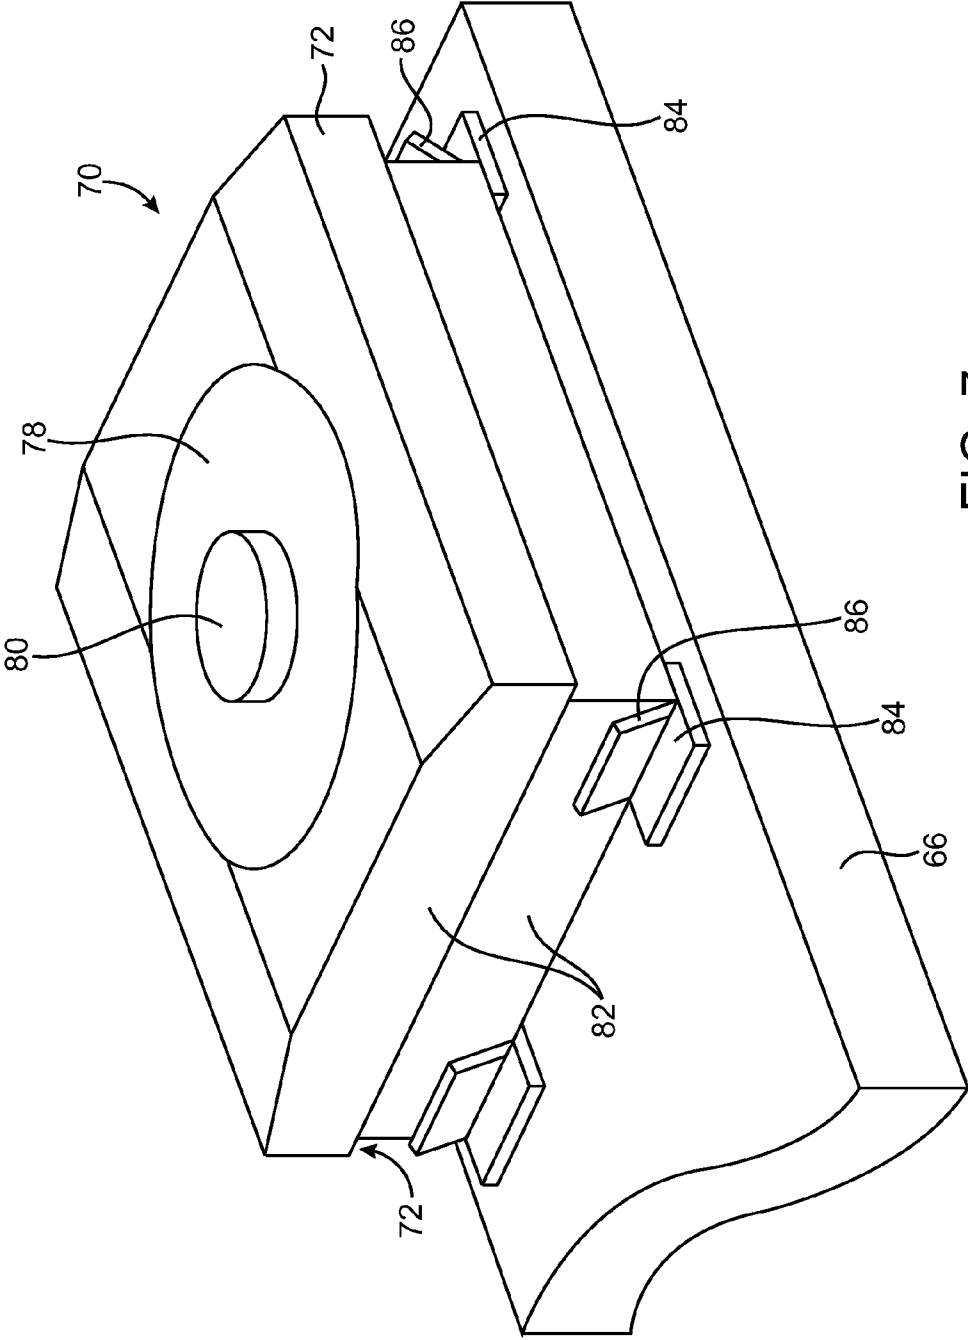


FIG. 7

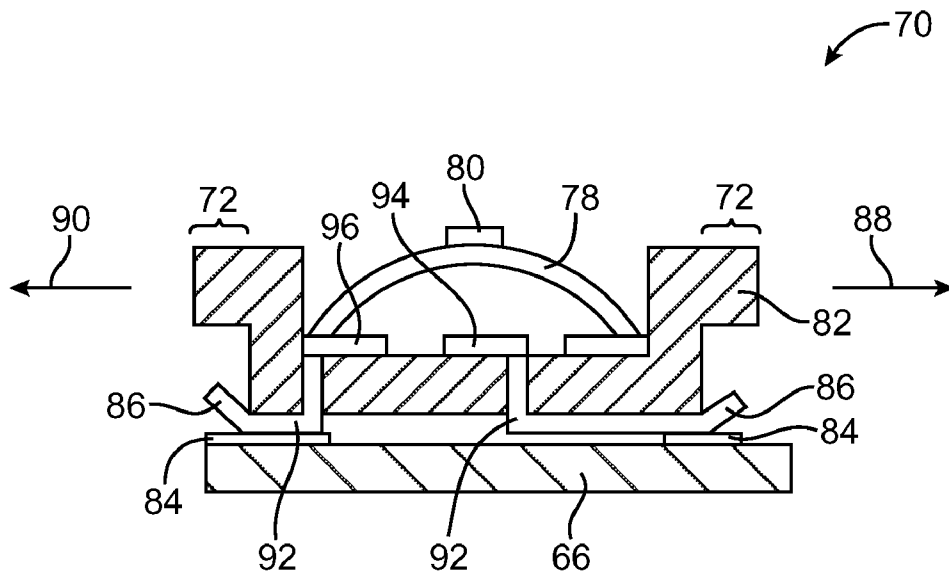


FIG. 8

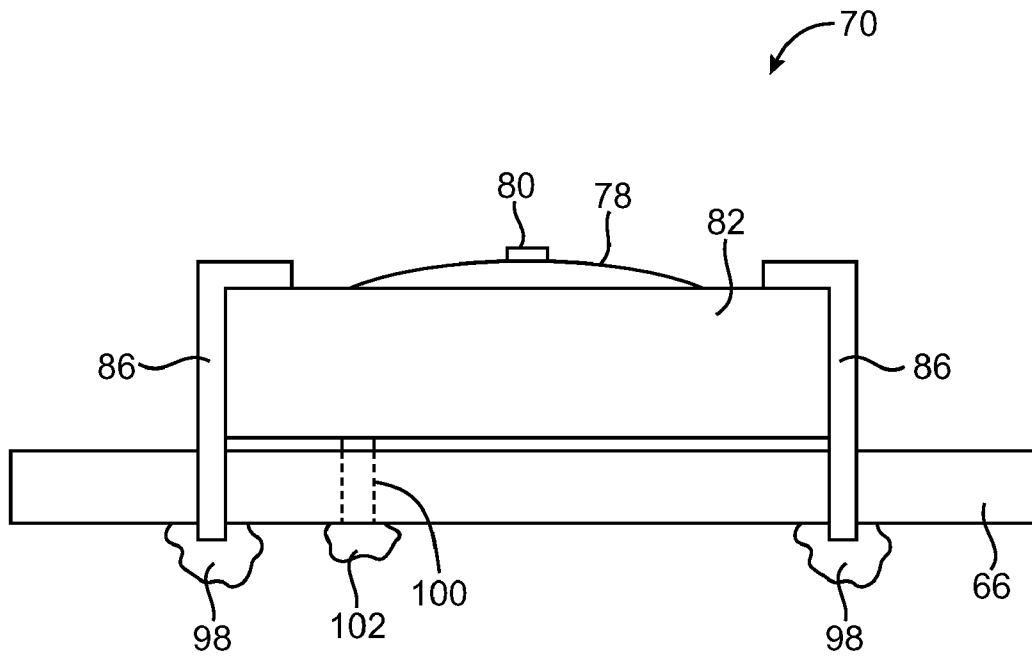


FIG. 9

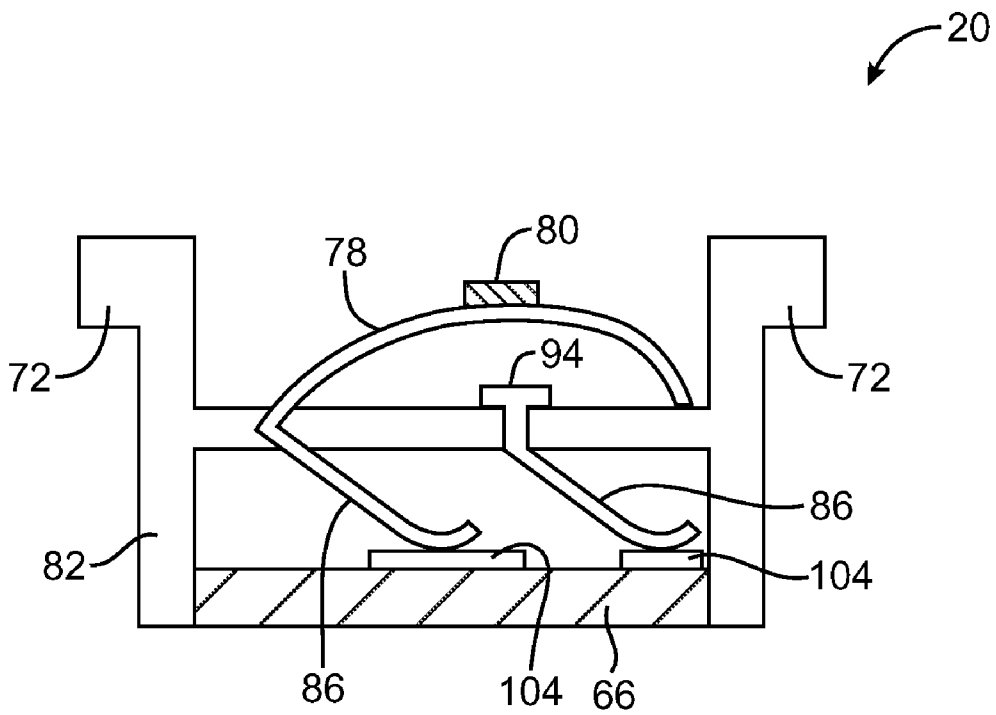


FIG. 10

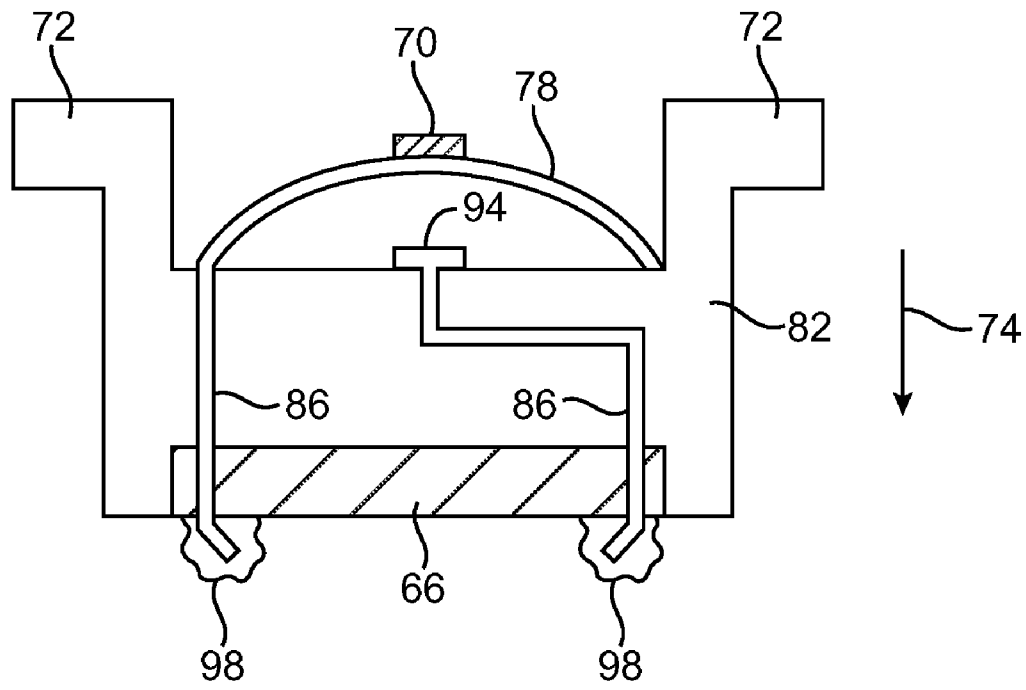


FIG. 11

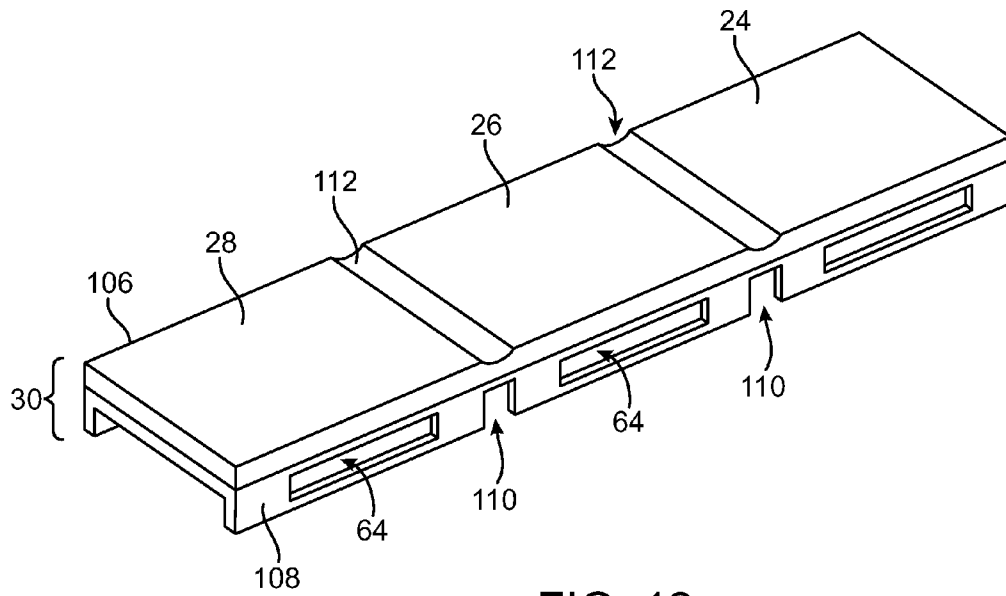


FIG. 12

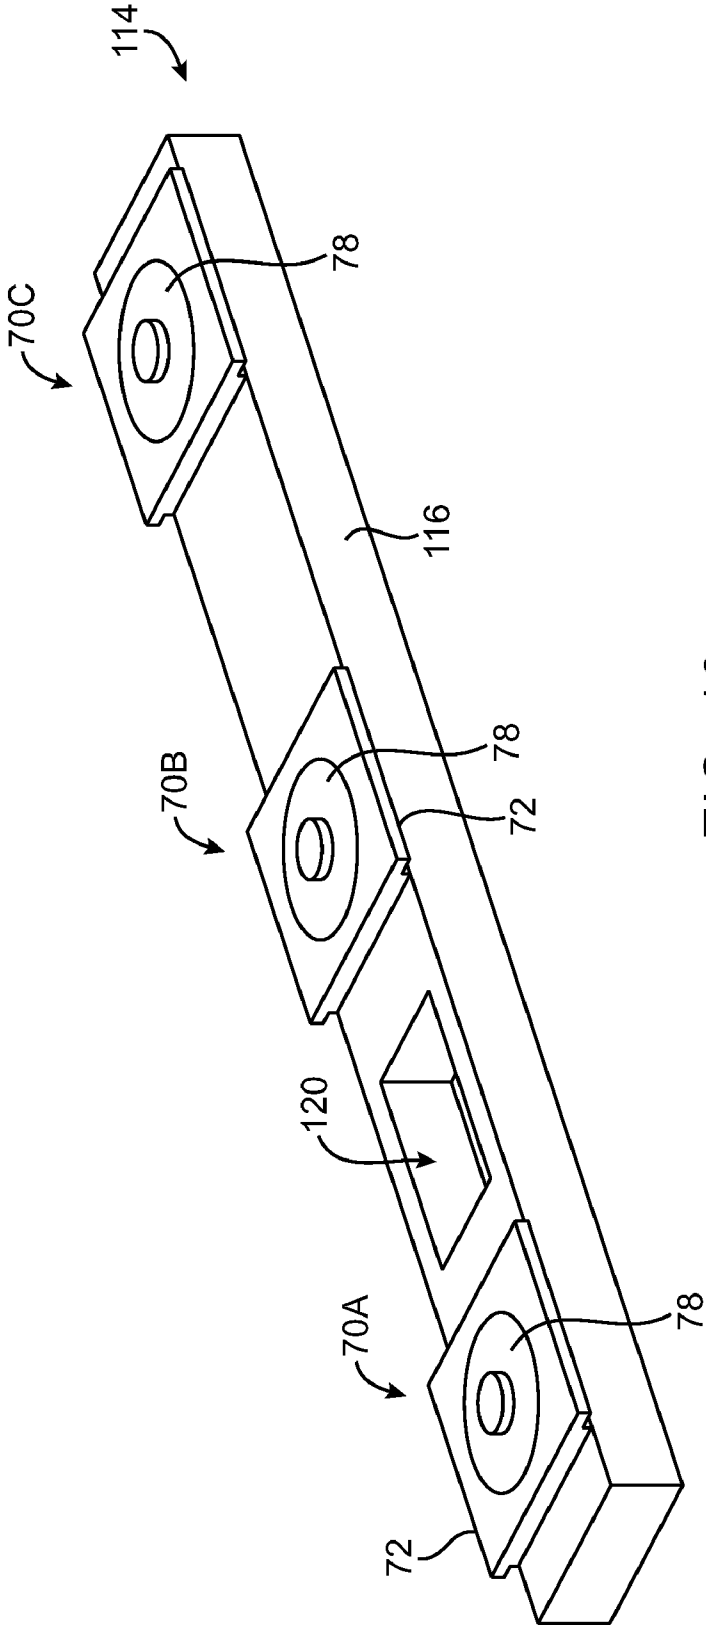


FIG. 13

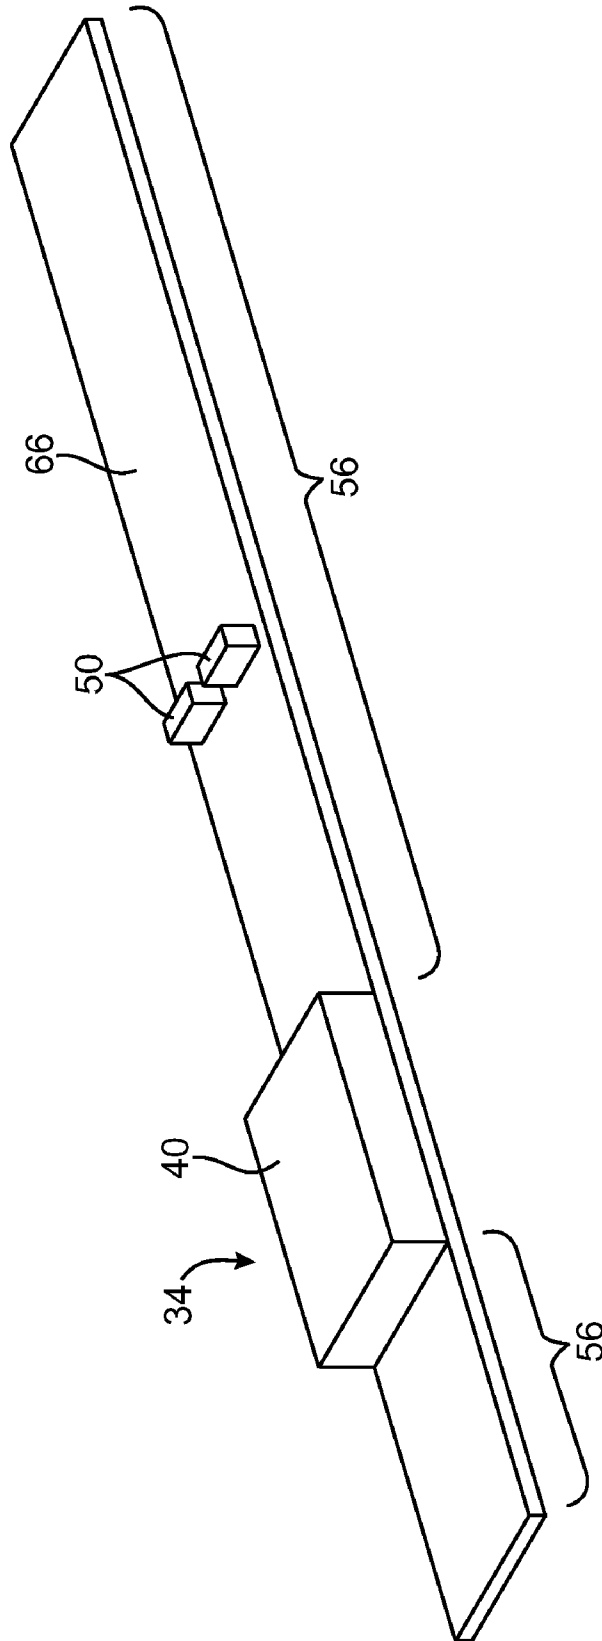


FIG. 14

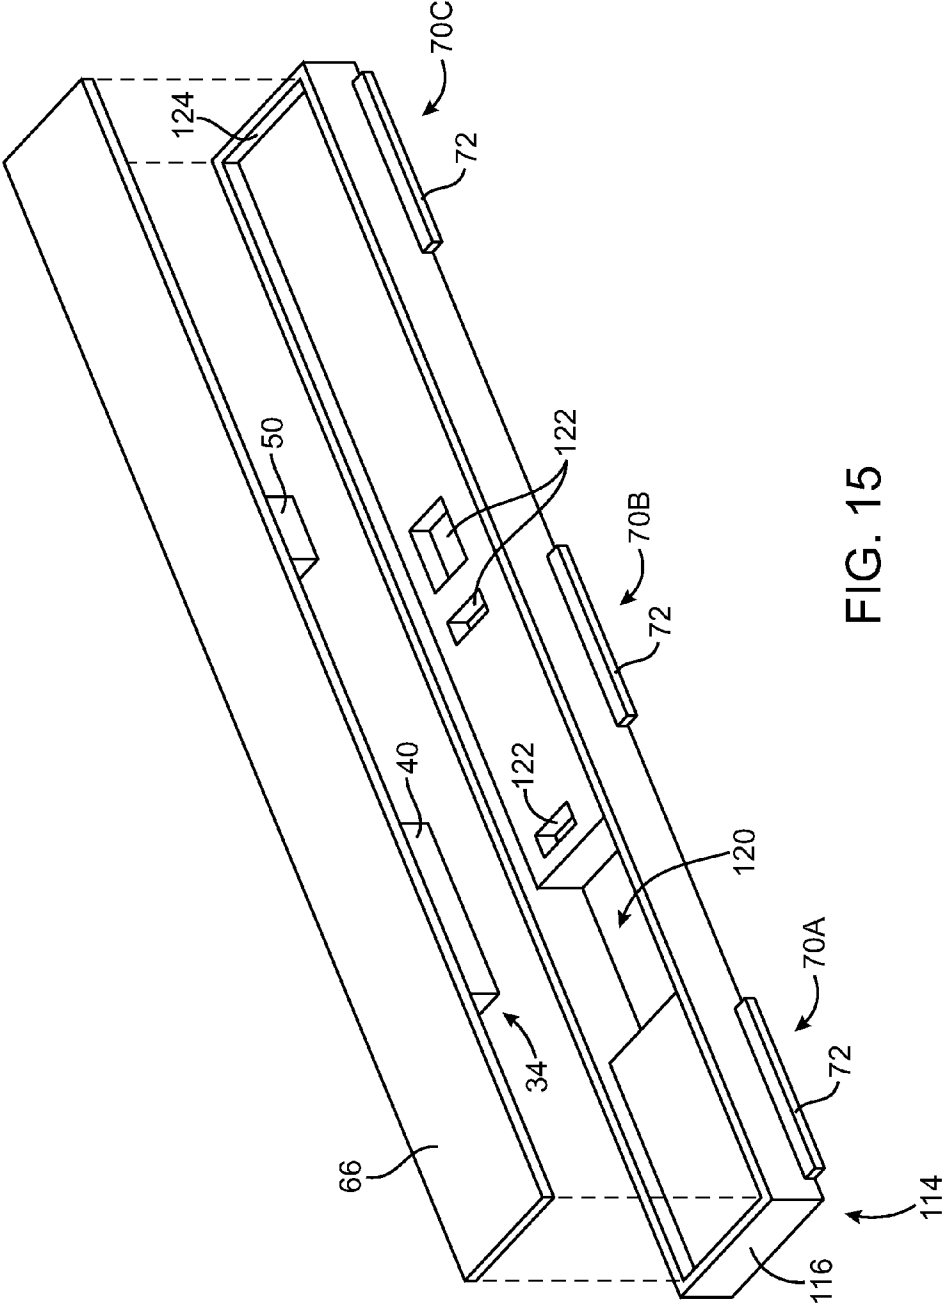


FIG. 15

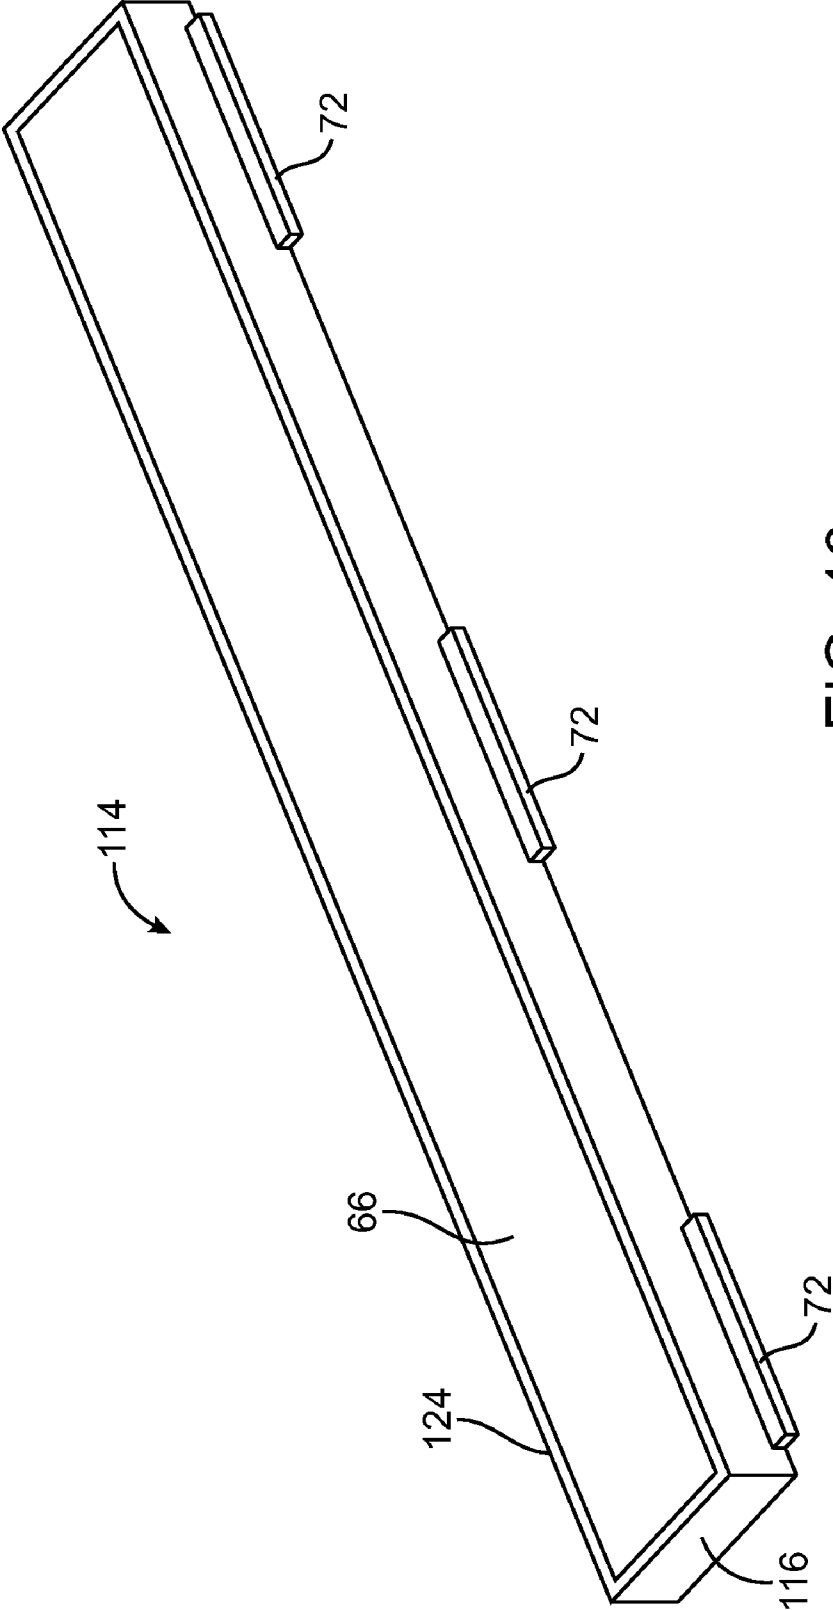


FIG. 16

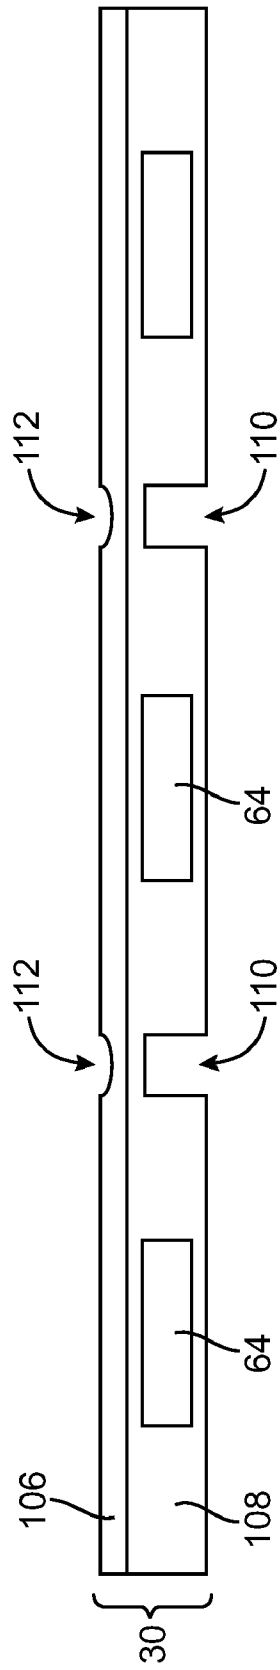


FIG. 17

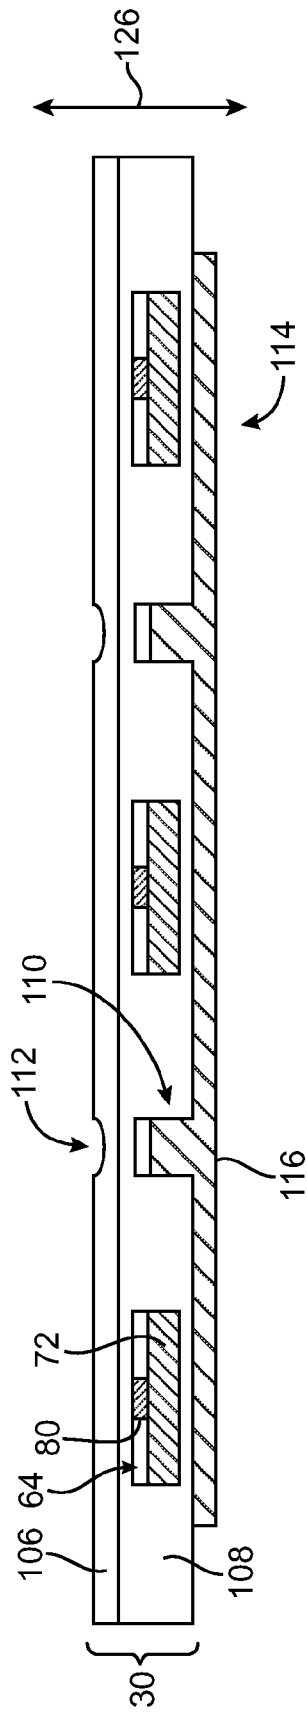


FIG. 18

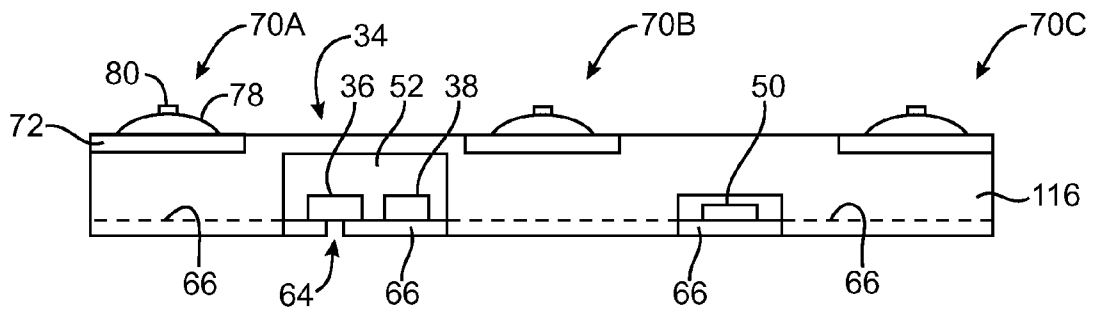
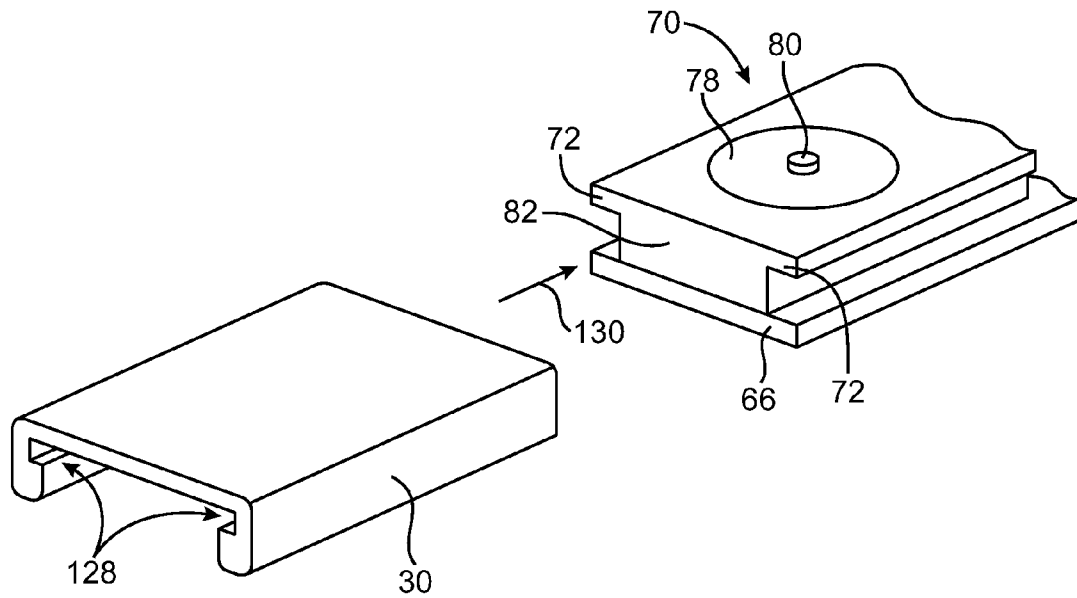


FIG. 19



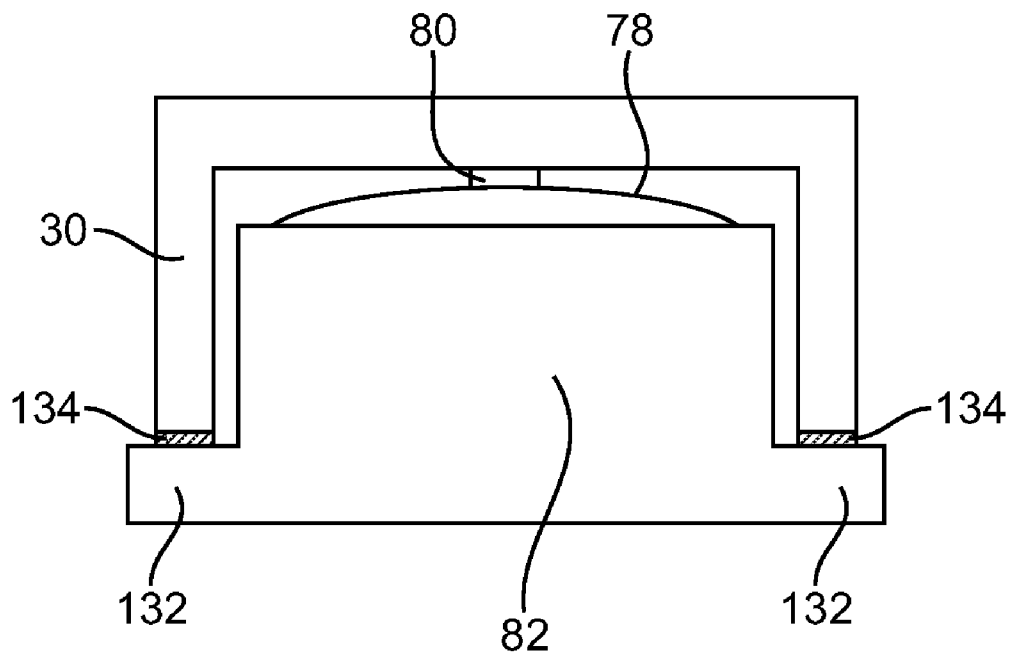


FIG. 21

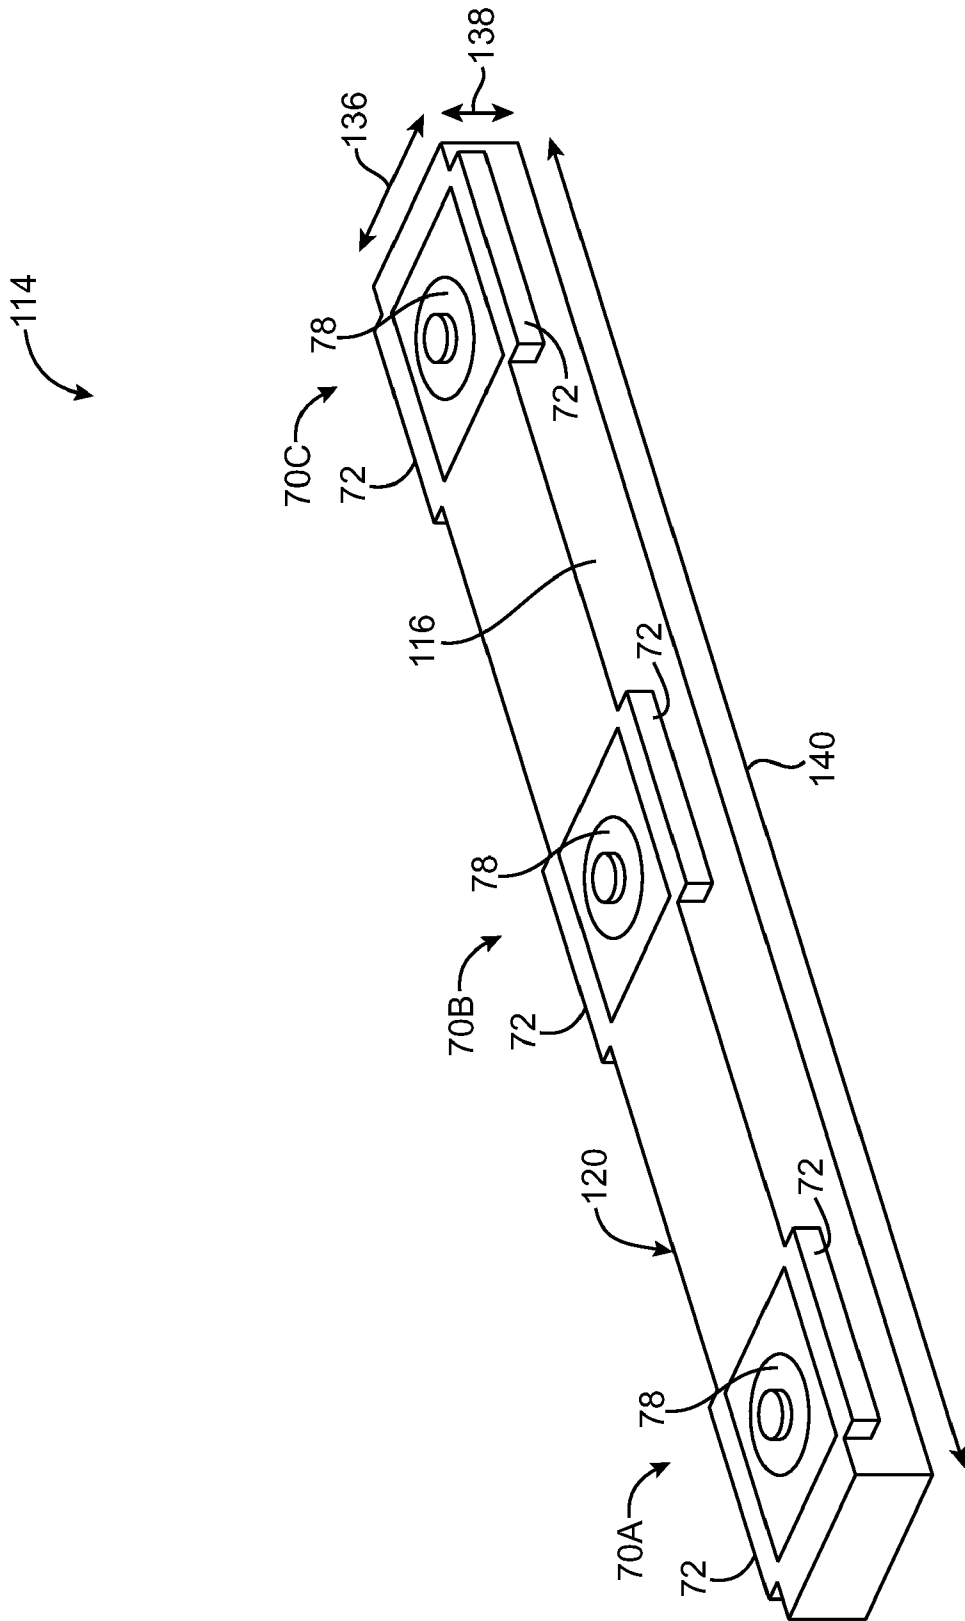


FIG. 22

ACCESSORY CONTROLLER FOR ELECTRONIC DEVICES

This application claims the benefit of provisional patent application No. 61/228,939, filed Jul. 27, 2009, provisional patent application No. 61/230,073, filed Jul. 30, 2009, and provisional patent application No. 61/232,374, filed Aug. 7, 2009, each of which is hereby incorporated by reference herein in its entirety.

BACKGROUND

This relates to electronic devices, and more particularly, to accessories for electronic devices with input components such as buttons and microphones.

Electronic devices such as computers, media players, and cellular telephones typically contain user interface components that allow these devices to be controlled by a user. It is sometimes desirable to add accessories to electronic devices. For example, a user may desire to plug a headset or adapter accessory into an electronic device to allow the user to listen to audio.

Headsets are sometimes provided with buttons and microphones. A headset microphone may be used to pick up a user's voice during a telephone call. Buttons may be used to control media file playback, to make volume level adjustments during a telephone call, and to issue other commands for the electronic device. Buttons and a microphone may be mounted within a button controller assembly. Microphone signals and button signals may be routed from the button controller assembly to an electronic device using wires in the headset.

The designers of accessories and other electronic equipment often attempt to reduce component size and part counts while retaining desired levels of functionality. Reduced component sizes and reduced part counts help to reduce device complexity and expense.

It would therefore be desirable to provide improved electronic device accessories such as accessories with improved buttons, microphones, and button controller assemblies.

SUMMARY

Electronic device accessories such as headsets with button controller assemblies are provided. A button controller assembly may include buttons and a microphone.

A microphone for the button controller assembly or other device may be formed by mounting an audio transducer to a substrate. The substrate may be a printed circuit board or other substrate that includes extending portions onto which integrated circuits and other components can be mounted. If desired, microphone components and other components can be mounted to substrates formed from parts of a housing.

Button functionality for the button controller assembly and other devices may be provided using switches that are actuated by button members. When a user presses a button member, the button member bears against the switch. Multiple buttons may be formed using a single flexible button structure. The switches may be implemented using dome switches.

The dome switches may have housings that directly mate with the button members. For example, the dome switch housings may have tabs that protrude into corresponding openings on a button structure. The housings of multiple dome switches may be formed from an integral structure. A printed circuit board may be mounted to the underside of the integral housing structure. Components such as integrated circuits, dome switch terminals, discrete circuit elements,

microphone components, and other circuitry may be connected to the printed circuit board. Cavities in the dome switch housing member may receive the components that are mounted to the printed circuit board.

Further features of the invention, its nature and various advantages will be more apparent from the accompanying drawings and the following detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1-22 show various structures in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

This relates to structures such as microphone and button structures that may be used in a button controller assembly for an electronic device accessory.

Electronic components such as microphones and buttons may be used in a wide range of applications. For example, microphones and buttons may be used to form a button controller for a headset or other accessory. Button controller assemblies that are suitable for use in headsets are sometimes described herein as an example. In general, however, button structures and microphone structures may be used in any suitable system.

An illustrative system in which an accessory may be used with an electronic device is shown in FIG. 1. As shown in FIG. 1, electronic device 10 may be coupled to an accessory such as headset 12 by plugging plug 16 of accessory 12 into jack 14 of electronic device 10.

Electronic device 10 may be a desktop or portable computer, a handheld electronic device such as a cellular telephone or media player, a tablet device, or any other suitable electronic device. Headset 12 may have speakers 18 and button controller assembly 22. Button controller assembly 22 and speakers 18 may be coupled to device 10 using cable 20 (e.g., a three-wire or four-wire headset cable). Button controller assembly 22 may, if desired, include a microphone. The microphone may be used by a user of device 10 and headset 12 during a telephone call (e.g., to pick up the user's voice).

Button controller assembly 22 may include buttons such as buttons 24, 26, and 28. There may, in general, be any suitable number of buttons in button controller assembly (e.g., one or more buttons, two or more buttons, three or more buttons, etc.). With one suitable arrangement, which is sometimes described herein as an example, button controller assembly 22 may include three buttons. These buttons may be used to issue commands for device 10. Examples of commands that may be issued for device 10 using the buttons of button controller assembly 22 include stop, forward, and reverse commands, volume up and down commands, telephone call control commands, etc.

A perspective view of an illustrative button controller is shown in FIG. 2. As shown in FIG. 2, button controller 22 may have an upper member 30 and a lower member 32. Upper member 30 may be used to form buttons 24, 26, and 28 and may therefore sometimes be referred to as a button structure or button member. Lower member 32 may be used to help enclose mechanical and electrical components in button controller 22 and may therefore sometimes be referred to as a button controller housing or enclosure. In the example of FIG. 2, button member 30 is used to form multiple buttons (i.e., buttons 24, 26, and 28). This type of integral button member arrangement is, however, merely illustrative. Button mem-

3

bers such as button member 30 may be used in forming a single button or multiple buttons. In configurations in which a single button member is used in forming multiple buttons, each portion of the button member may be flexed independently of the other portions of the button member. This allows a user to press one button (e.g., button 28) without activating the other buttons (e.g., buttons 26 and 24).

A cross-sectional side view of an illustrative microphone assembly of the type that may be used in button controller 22 or other equipment is shown in FIG. 3. As shown in FIG. 3, microphone assembly 34 (which may sometimes be referred to as a microphone or microphone structure) may have an audio transducer such as transducer 36. Transducer 36 may be used to convert sound into electrical signals. Transducer 36 may be formed using microelectromechanical systems (MEMS) technology. For example, transducer 36 may have a thin MEMS diaphragm. Transducer 36 may be mounted to substrate 44 (e.g., using epoxy, solder, etc.). A vertical opening such as hole 46 may be formed through substrate 44 to allow sound to enter transducer 36. Housing 40 may be mounted over transducer 36 to form sealed cavity 54 (e.g., using epoxy 42 or other suitable adhesives).

Microphone assembly 34 may include circuitry such as circuitry 38. Circuitry 38 may include discrete electrical components, application-specific integrated circuits (ASICs) and other suitable circuits. Circuitry 38 may be mounted on substrate 44 (e.g. in cavity 54 within housing 40).

Substrate 44 may contain conductive lines (traces) such as traces 48. Traces 48 may be used to interconnect microphone transducer 36 and circuitry 38. Wire bonds such as wire bond 52 may also be used in interconnecting transducer 36 to circuitry 38 if desired.

Substrate 44 may have extending portions such as portions 56 that extend beyond the edges of housing 40. Circuitry 50 may be mounted on the upper and lower surfaces of substrate 44 (e.g., in regions 56). Conductive traces 48 may be used to interconnect circuitry 50, circuitry 38, and transducer 36. Circuitry 50 and 38 may include switches, capacitors, resistors, inductors, integrated circuits, etc.

Housing 40 may be formed from any suitable material (e.g., metal, plastic or other dielectric materials, etc.). Substrate 44 is preferably formed from a material that accommodates conductive lines 48. As an example, substrate 44 may be formed from a dielectric such as plastic or other polymers. If desired, substrate 44 may be formed as part of a housing. Conductive traces may be formed on a plastic housing or other substrate by forming a patterned seed layer followed by electroplating (as an example). Conductive traces may also be formed by screen printing, physical vapor deposition and photolithography, insert molding (e.g., to embed metal wires, patterned metal foil, or other conductive structures within an encapsulating plastic structure), etc. With one suitable arrangement, substrate 44 is a printed circuit board. Printed circuit board materials that may be used for substrate 44 include rigid printed circuit board materials such as fiberglass filled epoxy (e.g., FR4) and flexible printed circuit board materials (e.g., flexible polymers such as polyimide). Flexible printed circuit boards are sometimes referred to as flex circuits.

FIG. 4 shows a cross-sectional side view of an illustrative configuration for microphone 34 in which port 46 is formed from an opening that passes through both substrate 44 and housing 40. Housing 40 may be mounted to structure 58 (e.g., a structural component of button assembly 22 such as a portion of a housing). Transducer 36 may be mounted adjacent to acoustic port 46. Circuitry 38 may be mounted within the sealed cavity formed by housing 40 (cavity 54). Substrate 44

4

in the configuration of FIG. 4 may be formed from rigid or flexible printed circuit board, plastic (e.g., part of a housing structure such as housing 40), etc.

Another configuration that may be used for microphone 34 in button assembly 22 is shown in FIG. 5. FIG. 5 is a cross-sectional side view showing how microphone 34 may be formed by mounting transducer 36 and circuitry 38 to the underside of substrate 44. Substrate 44 may be, for example, a flex circuit or rigid printed circuit board. Opening 46 may be formed through substrate 44 to allow transducer 36 to receive sound. Sealed cavity 54 may be formed by attaching substrate 44 to structure 60.

Structure 60 may be, for example, part of a plastic housing or other dielectric structure. Optional substrate extending regions 56 may be provided to allow circuitry 50 to be mounted to microphone assembly 34. Conductive interconnects such as interconnect line 48 may be used to route signals between circuitry 50 and microphone components such as microphone circuitry 38 and transducer 36. Circuitry 50 of FIGS. 3 and 5 may be circuitry for handling microphone signals or other circuitry (e.g., button controller circuitry, general purpose audio circuitry, communications circuitry, etc.).

An exploded cross-sectional side view of an illustrative button controller 22 is shown in FIG. 6. As shown in FIG. 6, button controller 22 may have upper and lower portions such as button member 30 and housing member 32. Housing member 32 and button member 30 may be formed from any suitable material (e.g., plastic, metal, etc.). In a typical configuration, button member 30 is formed from a flexible plastic that allows each button (i.e., buttons 28, 26, and 24) to independently flex downward in direction 74. Switches 70 are aligned with the buttons of button member 30, so that when a given button is pressed by a user, the button will flex into contact with a corresponding switch. This actuates the switch. Control circuitry can detect that the state of the switch has changed (e.g., by detecting a closed circuit) and can take appropriate action.

Switches 70 may be formed using any suitable switch structures. With one illustrative configuration, which is sometimes described herein as an example, switches 70 are formed using dome switch structures. Each dome switch 70 includes a hemispherical dome member that can be pressed downward by flexing an appropriate portion of button member 30 in direction 74. When the dome is fully compressed, the inside of the dome member will create a short circuit across the dome switches terminals. The dome may be formed from metal, metalized polymers, etc.

The hemispherical dome member of each dome switch 70 may be mounted to a housing. The housings may have tabs such as tabs 72 or other structures that allow switches 70 to directly mate with button member 30. By mating switches 70 directly to button member 30, button actuation tolerances may be improved relative to arrangements in which switches 70 and button member 30 are more indirectly coupled to each other (e.g., by using a frame or other structures in lower portion 76 of button assembly 22 to couple the dome switches to button member 30).

In the example of FIG. 6, switches 70 have tabs 72 that protrude into and out of the page. Each tab 72 may mate with a corresponding engagement structure in button member 30. For example, each tab 72 may protrude into a corresponding opening 64 in one of portions 62 of button member 30 when button member 30 and lower assembly portion 76 are in an assembled (mated) state. Openings 64 may be larger than tabs

5

72 to allow button member 30 to travel with respect to switches 70 and the rest of lower portion 76 of button controller assembly 22.

The use of tabs such as tabs 72 and interlocking features such as openings 64 is merely illustrative. Any suitable arrangement may be used to directly mate button member 30 to switches 70 and thereby couple button member 30 to lower portion 76. For example, springs and mating openings may be used, adhesive or other rigid fastening mechanisms may be used, rails and recessed grooves may be used, other interlocking features that capture each other (e.g., using protrusions and recesses, etc.) may be used, etc. The use of dome switch housing protrusions 72 and corresponding button member openings 64 as the engagement structures that hold member 30 and portion 76 of assembly 22 together is merely illustrative. Moreover, it is not necessary for the opening portion of the engagement structures to be formed on member 30. As an example, holes may be formed in the housings of switches 70 into which tabs on button member 30 protrude.

The housings of switches 70 may be connected to structure 66. Structure 66 may be a rigid or flexible printed circuit board, a structural member such as a frame or housing piece, or any other structure. If desired, the housings of switches 70 may be formed from a single piece of material. With this type of arrangement, structure 66 need not be used to form a structural support for the dome switches and can be omitted or formed from a non-structural material (e.g., a flex circuit).

When dome switches such as switches 70 are interconnected to each other using a unitary housing structure or other integral mounting arrangement, it is not necessary to provide an additional printed circuit board on which individual dome switches are mounted. One or more printed circuit boards or other additional structures may, however, be attached to the integral dome switch structure if desired (e.g., to help route signals between dome switches 70 and other circuit components in button controller 22). Arrangements in which the housings for multiple switches 70 are formed a unitary structure such as a single molded plastic part are sometimes referred to as integral frame and switch structure arrangements.

Dome switches 70 and/or structure 66 (whether structure 66 is formed as an integral portion of one or more dome switch housings or as a separate structure) may be connected to housing 32 using adhesive 68 or other suitable fastening mechanisms (e.g., rivets, screws, snaps, etc.). If desired, switches 70, structure 66, and housing 32 may be formed as an integral part (e.g., using one molded plastic part).

A perspective view of an illustrative dome switch is shown in FIG. 7. As shown in FIG. 7, dome switch 70 may have a housing such as dome switch housing 82. Housing 82 may be formed from a material such as liquid crystal polymer, glass-filled nylon, or other material (e.g., a material that flows well when molding small parts and that is rigid and strong). Switch 70 may have terminals 86 that are soldered to respective contact pads 84 on structure 66. Structure 66 may be, for example, a substrate such as a flex circuit or a rigid printed circuit board.

As illustrated in FIG. 7, protrusions (tabs) 72 may be formed as an integral portion of housing 82. Hemispherical dome switch diaphragm 78 may be mounted in housing 82. Nub 80 may be formed from epoxy or other suitable material and serves as a durable point of contact between dome switch 70 and the lower surface of button member 30 during operation of switch 70.

Although only a single switch 70 is shown in the example of FIG. 7, additional switches 70 may be rigidly connected together. For example, individual switches 70 may be

6

mounted on the same substrate 66. If desired, the length of housing 82 may be extended so that multiple switches 70 can be formed using a single unitary structure. This unitary switch housing structure may be sufficiently strong that substrate 66 can be omitted or so that substrate 66 may be made of a flexible material (i.e., a flex circuit substrate).

A cross-sectional end view of an illustrative dome switch is shown in FIG. 8. As shown in FIG. 8, dome switch 70 may have a dome member such as hemispherical conductive dome member 78 that is mounted in housing 82. Protrusions 72 may extend laterally in directions 88 and 90 to mate with corresponding holes 64 in button member 30 (FIG. 6). Terminals 86 may be formed using metal foil members 92 or other conductive structures. These structures may be electrically connected to dome 78 and inner switch contact pad 94. When dome 78 is compressed, peripheral pad 96 and central pad 94 are shorted to each other, thereby closing switch 70.

The cross-sectional side view of FIG. 9 shows how terminals 86 may be formed from metal structures that pass through holes in substrate 66. This type of configuration may help retain switch 70 and its housing 82 on substrate 66. Solder 98 may be used to help attach structures 86 to traces on substrate 66 and may help retain structures 86 in the holes of substrate 66. As shown by dashed line 100 and solder 102, metal terminal structures and other such structures that hold switch 70 to substrate 66 may be formed under switch 70 (e.g., to avoid the lateral size constraints imposed by using metal terminal structures that run along the exterior edges of housing 82).

As shown in FIG. 10, terminal structures 86 may be formed using bent metal springs. With the spring arrangement of FIG. 10, the bent metal of each terminal 86 contacts a respective contact pad (i.e., contact pads 104) on the surface of substrate 66. This type of configuration avoids the need to use solder, which may facilitate assembly and rework operations.

FIG. 11 is a cross-sectional side view of an illustrative configuration that may be used for switch 70 in which substrate 66 is mounted within a recess in the underside of switch housing 82. Switch housing 82 may be, for example, a unitary housing structure that receives multiple hemispherical dome members 78 and that serves as a structural support member (e.g., a frame). Substrate 66 may be a printed circuit board (e.g., a flex circuit) and need not provide structural support for switches 70. Solder connections 98 may be used to interconnect traces on circuit board 66 to switch terminals 86. Other circuits (e.g., microphone 34, integrated circuits, and other circuitry) may be mounted on printed circuit board 66 if desired. Such other circuits may be mounted on the upper side of circuit board 66 (e.g., so that these components protrude into recesses within the underside of housing structure 82) or on the lower surface of printed circuit board 66 (e.g., so that these components protrude downward in direction 74).

A perspective view of an illustrative button member for button controller 22 is shown in FIG. 12. As shown in FIG. 12, button member 30 may have a frame structure 108 and button structure 106. Button structure 106 and frame member 108 may be formed as a single unitary piece of material (e.g., using metal, plastic, or other suitable materials). In the example shown in FIG. 12, button structure 106 and button frame member 108 are formed from separate materials. Frame 108 may be formed from metal or other materials and may have holes 64 that engage tabs 72 on dome switches 70. Button structure 106 serves as a button cover and may be formed from plastic, metal, or other materials. With one suitable arrangement, frame 108 is formed from metal and button structure 106 is formed from plastic (e.g., a thermoplastic) that is molded onto frame 108.

Button structure **106** may have grooves **112** and frame **108** may have notches **110**. These recessed portions of structures **106** and **108** may be interposed between respective buttons (i.e., between button **28** and **26** and between button **26** and **24**). Because there is less material in button member **30** in the vicinity of grooves **112** and notches **110**, button member **30** exhibits enhanced flexibility in these thinned regions. This enhanced flexibility helps to isolate the buttons from each other, so that only a desired button flexes when pressed by a user.

An interior portion of button controller assembly **22** is shown in FIG. **13**. In the example of FIG. **13**, button controller structures **114** are of the type that are configured to mate with button member **30** of FIG. **12**. Structures **114** include three dome switches: switch **70A**, switch **70B**, and switch **70C**. Each dome switch may have associated tabs **72** that extend laterally outward for engagement with holes **64** in frame **108** (FIG. **12**). Support structure **116** may be formed from plastic, metal, printed circuit board material, or other suitable materials. With one suitable arrangement, structure **116** and the housings of switches **70A**, **70B**, and **70C** are formed from a single unitary piece of plastic (i.e., structure **116** may be a dome switch housing member). Opening **120** may be used to accommodate housing **40** of microphone **34** (e.g., microphone **34** of FIG. **3**) and other circuitry and components for button controller assembly **22**.

Button controller structures **114** may sometimes be referred to herein as a low profile switch assembly and a small form factor switch assembly (e.g., relative to audio cable **20** and the average size of a user's finger). Support structure **116** may form an enclosure for the electrical components associated with switches **70A**, **70B**, and **70C**. Instead of having structure **116** only support discrete and self-contained switches, switches **70A**, **70B**, and **70C** may be built into a single body such as structure **116** (sometimes referred to as a unitary switch body (e.g., the switches may be integrated in, embedded in, integral with, molded in, or internally disposed within structure **116**). Structure **116** may be referred to herein as a unitary switch body (e.g., a single piece of material such as a single piece of molded plastic having integral switches **70A**, **70B**, and **70C**. This type of arrangement may help to reduce the number of components in a switch assembly (which may facilitate building smaller switch assemblies and which may also facilitate manufacturing of the switch assemblies by reducing the number of components).

An illustrative printed circuit **66** on which housing **40** of microphone **34** may be mounted for assembly with structures **114** of FIG. **13** is shown in FIG. **14**. As shown in FIG. **14**, housing **40** of microphone **34** may be mounted in a portion of printed circuit **66** that allows housing **40** to protrude into opening **120** of FIG. **13** when printed circuit board **66** is mounted to the underside of structures **114** of FIG. **13**. Printed circuit board **66** may be formed from any suitable structure such as a printed circuit board, a rigid printed circuit board, a rigid-flex printed circuit board, a flexible printed circuit board, a flexible circuit, one or more integrated circuits or chips, and any other suitable structure or medium for circuitry. Printed circuit board **66** and may have extending regions **56** on which circuitry **50** and other components may be mounted (as described in connection with extending portions **56** of substrate **44** in FIG. **3**). With one suitable arrangement, printed circuit board **66** may be integrated into structure **116** to form switch assembly **114**. As examples, printed circuit board **66** may be integral with, internal to, within, or internally disposed within the confines of unitary structure **116**. In general, printed circuit board **66** may include any desired circuits and circuit components. For example, circuit

board **6** may include electrical components associated with switches **70A**, **70B**, and **70C** and/or other electrical components such as components associated with microphone **34** and other circuitry.

FIG. **15** is an exploded perspective view of printed circuit board **66** and microphone housing **40** of FIG. **14** in alignment with opening **120** and the underside of structure **114** of FIG. **13**. As shown in FIG. **15**, structure **116** may have a printed circuit board recess formed from shallow sidewalls **124**. Printed circuit board **66** may have a substantially rectangular shape that is received within the recess formed by sidewalls **124**. When printed circuit board **66** is mounted in this recess, microphone housing **40** may protrude into opening **120** and additional circuitry **50** may protrude into recesses **122**. Structure **116** and tabs **72** may be formed from a single structure (e.g., a plastic structure) that serves as both a housing for each of the dome switches (**70A**, **70B**, and **70C**) and as a structural support for the switches that allows direct attachment of button member **30** to the switches.

FIG. **16** is a perspective view of button controller structure **114** after printed circuit **66** of FIG. **15** has been mounted in the recess in structure **116** that is formed by sidewalls **124**.

FIG. **17** is a side view of button member **30** of FIG. **12** before assembly with dome switch structure **114**.

FIG. **18** is a side view of button member **30** of FIG. **12** and structure **114** of FIG. **13** after these two parts have been assembled to each other. In the assembled state of FIG. **18**, tabs **72** of dome switch housing structure **116** protrude into holes **64** in frame **108** of button member **30**. Holes **64** capture tabs **72**. Because holes **64** have inner dimensions that are slightly larger than the outer dimensions of tabs **72** (at least in vertical dimension **126**), button member **30** and button cover structure **106** may travel relative to structures **116**. Structures **116** may be formed as an integral portion of lower housing **32** of button controller **22** (FIG. **2**) or may be attached to housing **32** (e.g., using adhesive, snaps, or other fasteners). The travel allowed by the relative sizes of holes **64** and tabs **72** allows the controller buttons to be pressed by a user to actuate the dome switches.

As shown in the cross-sectional side view of FIG. **19**, the housing for microphone **34** may be formed as an integral part of dome switch structure **116**. Transducer **36** may be mounted above hole **64** in substrate **66**. Circuitry **38** and circuitry **50** may also be mounted to substrate **66**. Substrate **66** may be mounted to the underside of structure **116** (e.g., in a recess of the type shown in FIG. **15**). Cavity **52** may be formed from a recess in structure **116**. When substrate **66** is mounted to structure **116** as shown in FIG. **19**, microphone transducer **36** and circuitry **38** may be sealed within microphone cavity **52** (i.e., a cavity of the type formed by housing **40** of FIG. **3**). Other recesses in structure **116** may receive protruding circuitry **50**. Substrate **66** of FIG. **19** may be plastic, metal, a printed circuit board such as a rigid or flexible printed circuit board, etc. and may be attached to structure **116** using epoxy or other suitable adhesives (as an example).

If desired, button member **30** may be assembled by sliding button member **30** into place over dome switch tabs **72**. This type of assembly approach is shown in FIG. **20**. As shown in FIG. **20**, button member **30** may be provided with grooves such as grooves **128**. Grooves **128** may be configured to mate with tabs **72** of dome switch housing **82**. Button member **30** may be mounted to dome switches **70** by sliding button member **30** onto dome switches **70** in direction **130**, taking care to align grooves **128** with tabs **72**. Snaps or other engagement features may be used to hold button member **30** in place following assembly.

Button member **30** can be configured to flex relative to the dome switches without exhibiting travel of the type permitted by using holes **64** that are larger than tabs **72**. FIG. **21** is a cross-sectional end view of a button controller structure showing how button member **30** may be attached to dome switch housing **82** (i.e., an integral support structure for multiple dome switches) at protruding dome switch ledges **132** using adhesive **134**. With this type of configuration, button member **30** is rigidly attached to the dome switches, so button actuation events involve flexing of button member **30**. Button member **30** may, for example, be formed from a thin metal or plastic (e.g., a thermoplastic) that is sufficiently flexible to be resiliently deformed. When an exposed button surface is pressed downwards by a user, button member **30** will flex sufficiently to actuate dome switch member **78**. When the user releases the button surface, button member **30** returns to its nominal shape and releases the switch. Because button member **30** flexes, switches can be actuated without allowing the entire button member to travel relative to dome switches **70**.

Another view of the interior portion of button controller assembly **22** illustrated in FIG. **13** is shown in FIG. **22**. As shown in the example of FIG. **22**, tabs **72** associated with each dome switch may lie in a common plane with the upper surface of support structure **116** (e.g., tabs **72** may lie flush with the top of structure **116**). FIG. **22** also illustrates that support structure **116** (e.g., button controller structures **114**) may have dimensions such as thickness **138**, width **136**, and length **140**. In general, support structure **116** may have any suitable dimensions. With one suitable arrangement, structure **116** may have a thickness such as thickness **138** that is between 0.5 and 6.0 mm, a width such as width **136** that is between 1.0 and 10.0 mm, and a length such as length **140** that is between 20.0 and 40.0 mm. As one example, structure **116** may have a thickness of approximately 1.0 mm (e.g., a thickness between 0.9 and 1.1 mm), a width of approximately 3.0 mm (e.g., a width between 2.9 and 3.1 mm), and a length of approximately 21.0 mm (e.g., a length between 20.9 and 21.1 mm). With another suitable arrangement, structure **116** may have a height such as height **138** of 6.0 mm or less, a width such as width **136** of 10.0 mm or less, and a length such as length **140** of 40.0 mm or less. The height (i.e., the thickness) of structure **116** may include the height (i.e., the thickness) of the dome switches (e.g., dome switches **70A**, **70B**, and **70C**) above the upper surface of structure **116** (e.g., thickness **138** may extend from the bottom surface of structure **116** to the top of the dome switches).

The foregoing is merely illustrative of the principles of this invention and various modifications can be made by those skilled in the art without departing from the scope and spirit of the invention.

What is claimed is:

1. A button controller assembly, comprising:
a button member; and

a dome switch housing member in which at least one hemispherical dome switch member is housed, wherein the dome switch housing member and the button member are configured to directly mate with each other, wherein the dome switch housing member is a unitary structure having an engagement structure, and wherein the button member is a unitary structure having an engagement structure that couples with the engagement structure on the dome switch housing member.

2. The button controller assembly defined in claim **1** wherein the engagement structure on the button member comprises at least one opening and wherein the engagement structure on the dome switch housing comprises at least one tab that protrudes into the opening.

3. The button controller assembly defined in claim **2** further comprising a recess in the dome switch housing member that receives a microphone.

4. The button controller assembly defined in claim **3** further comprising a printed circuit board, wherein the microphone comprises a transducer mounted on the printed circuit board.

5. The button controller assembly defined in claim **1** wherein the button member comprises a metal frame and a plastic button structure molded to the frame.

6. A switch assembly, comprising:

a housing for a plurality of switches, wherein the housing is formed from a unitary structure and wherein each of the switches is integrated into the unitary structure;

a circuit module within the unitary structure, wherein the unitary structure has a thickness that is less than 6.0 mm; and

a button member comprising a plurality of buttons each of which engages with a respective one of the switches, wherein the button member is a unitary structure.

7. The switch assembly defined in claim **6** wherein the switches comprise a plurality of dome switches.

8. The switch assembly defined in claim **6** wherein the circuit module comprises interconnects that are electrically connected to the switches.

9. The switch assembly defined in claim **6** wherein the thickness of the unitary structure is between 0.9 mm and 1.1 mm.

10. The switch assembly defined in claim **6** wherein each of the switches comprises at least one electrical contact pad and wherein the housing directly supports the electrical contact pads in the switches.

11. The switch assembly defined in claim **6** wherein each of the switches comprises a first switch contact pad, a second switch contact pad, and a compressible member.

12. The switch assembly defined in claim **11** wherein, when a given switch is pressed, the compressible member in the given switch electrically couples together the first and second switch contact pads and wherein the housing directly supports the first and second switch contact pads and at least a portion of the compressible member.

13. The switch assembly defined in claim **6** wherein the unitary structure has portions defining a cavity and wherein the circuit module is mounted within the cavity.

14. The switch assembly defined in claim **6** wherein each of the switches has portions integrated into the unitary structure.

15. The switch assembly defined in claim **6** wherein the circuit module comprises electrical components coupled to the plurality of switches and electrical components coupled to a microphone.

16. A small form factor switch assembly, comprising:

an integrated switch component having a plurality of discrete switches that are integral with and that share a common unitary switch body and having a circuit module that is operatively coupled to the plurality of discrete switches and that is internally disposed within the unitary switch body, the circuit module containing at least a portion of the circuitry associated with the switch assembly, wherein the integrated switch component has a height, width and length less than or equal to 6.0 mm, 10.0 mm and 40.0 mm, respectively; and

11

a button member comprising a plurality of buttons each of which engages with a respective one of the discrete switches, wherein the button member is a unitary structure.

17. A switch assembly, comprising:

an integrated switch component having a plurality of discrete switches that are integral with and that share a common unitary switch body; and

a button member comprising a plurality of buttons each of which engages with a respective one of the discrete switches, wherein the button member is a unitary structure.

12

18. A switch assembly, comprising:

an integrated switch component having a plurality of discrete switches that are integral with and that share a common unitary switch body and having a circuit module that is internally disposed within the unitary switch body; and

a button member comprising a plurality of buttons each of which engages with a respective one of the discrete switches, wherein the button member is a unitary structure.

* * * * *